
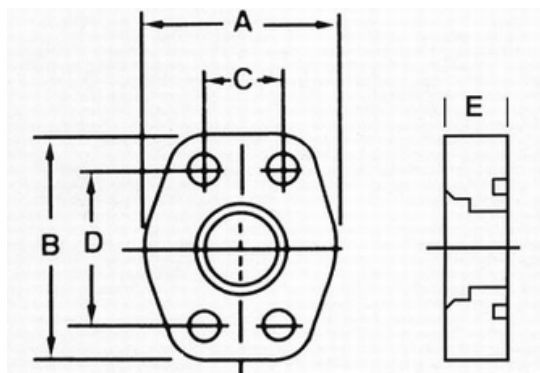


Flange – F5 Series

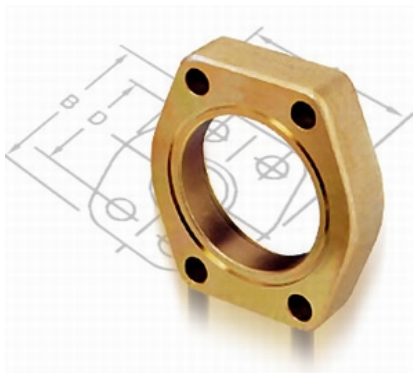

Model	Size	A	B	C	D	E	O-ring	Screw
F5-04-A	Threaded 1/2"	40	54	17.5	38.1	30	P22	M8×40
F5-04-W-A	Threaded 3/8"							
F5-04-B	Weld 1/2"							
F5-04-W-B	Weld 3/8"							
F5-06-A	Threaded 3/4"	48	65	22.2	47.6	30	G30	M10×45
F5-06-B	Weld 3/4"							
F5-08-A	Threaded 1"	55	70	26.2	52.4	30	G35	M10×45
F5-08-W-A	Threaded 3/4"							
F5-08-B	Weld 1"							
F5-08-W-B	Weld 3/4"							
F5-10-A	Threaded 1-1/4"	64	80	30.2	58.7	30	G40	M10×45
F5-10-W-A	Threaded 1"							
F5-10-B	Weld 1-1/4"							
F5-10-W-B	Weld 1"							
F5-12-A	Threaded 1-1/2"	72	94	35.7	69.9	30	G50	M12×50
F5-12-W-A	Threaded 1-1/4"							
F5-12-B	Weld 1-1/2"							
F5-12-W-B	Weld 1-1/4"							
F5-16-A	Threaded 2"	85	102	42.9	77.8	30	G65	M12×50
F5-16-W-A	Threaded 1-1/2"							
F5-16-B	Weld 2"							
F5-16-W-B	Weld 1-1/2"							
F5-20-A	Threaded 2-1/2"	102	114	50.8	88.9	38	G75	M12×60
F5-20-W-A	Threaded 2"							
F5-20-B	Weld 2-1/2"							
F5-20-W-B	Weld 2"							
F5-24-A	Threaded 3"	116	135	61.9	106.4	38	G85	M16×55
F5-24-B	Weld 3"							
F5-28-A	Threaded 3-1/2"	134	153	69.9	120.7	38	G100	M16×55
F5-28-B	Weld 3-1/2"							
F5-32-A	Threaded 4"	150	162	77.8	130.2	38	G115	M16×55
F5-32-B	Weld 4"							

- Options : Screw and O-ring
- Specifications and design are subject to change without notice