



The diagram shows a hydraulic pump on the left. To its right is a specification tree for the model HGP-22A-F-22-R-X-4BJ. The tree branches from the model name into seven categories: Model Name, Body Design, Mounting, Displacement, Rotation, Shaft Type, and Flange Type. Each category has a line connecting it to a specific part of the model name. For example, 'Model Name' connects to 'HGP', 'Body Design' to '22A', 'Mounting' to 'F', 'Displacement' to '22', 'Rotation' to 'R', 'Shaft Type' to 'X', and 'Flange Type' to '4BJ'.

※ Specification

Specification	Value
Model Name	HGP
Body Design	22A
Mounting	F
Displacement	22
Rotation	R
Shaft Type	X
Flange Type	4BJ


Mounting:
 F: Flange Type
 L: Foot Type

Rotation:
 R: Clockwise
 L: CCW

Shaft Type:
 X: Standard
 Y: Spline
 Z: Taper Shaft

Flange Type:
 4BJ: JIS 4-bolt

Model	Displacement	Pressure	Dimension	
		Max.	A	B
HGP-22A- ※ 22 ※	2+2 cc/rev	210 bar	174.5 mm	43 mm
HGP-22A- ※ 33 ※	3+3 cc/rev		176.5 mm	45 mm
HGP-22A- ※ 44 ※	4+4 cc/rev		180.5 mm	49 mm
HGP-22A- ※ 66 ※	6+6 cc/rev		183.5 mm	52 mm
HGP-22A- ※ 88 ※	8+8 cc/rev		185.5 mm	54 mm
HGP-22A- ※ 99 ※	9+9 cc/rev		188.5 mm	57 mm
HGP-22A- ※ 1111 ※	11+11 cc/rev		191.5 mm	60 mm
HGP-22A- ※ 1212 ※	12+12 cc/rev		194.5 mm	63 mm

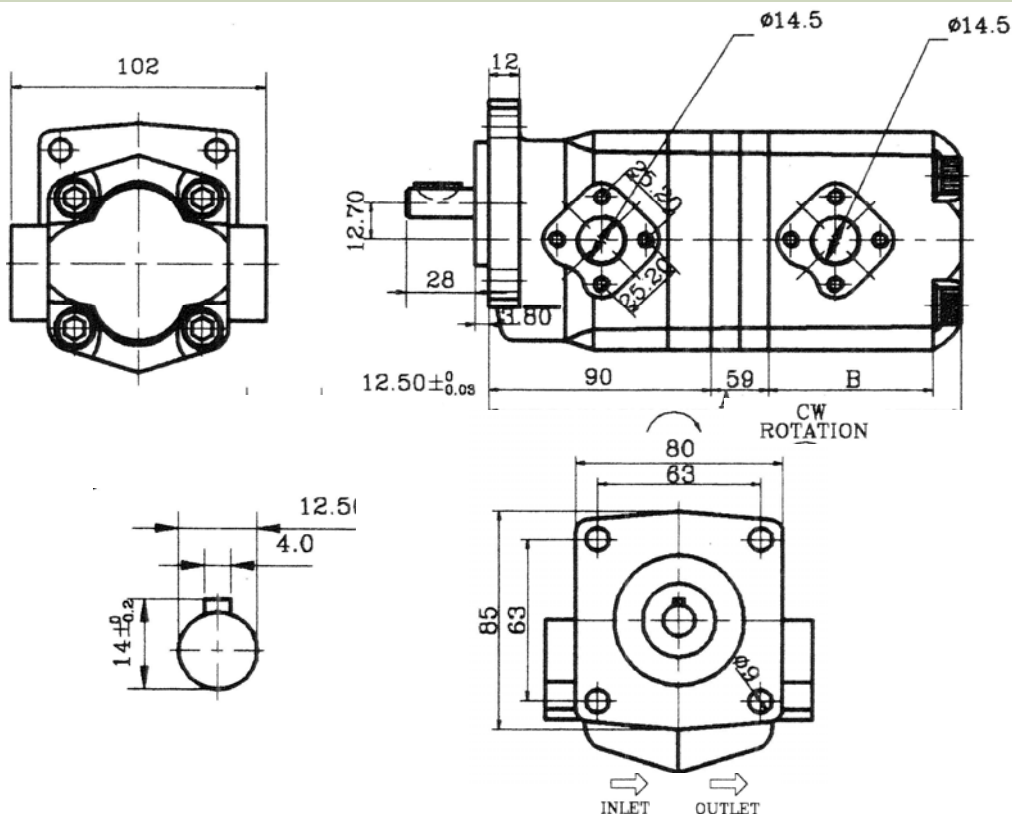

- Specifications and design are subject to change without notice