

YEOSHE

YEOSHE HYDRAULICS CO.,LTD.

CTS COOLANT THROUGHT SPINDLE HIGH PRESSURE WATER PUMP



+886-4-23332339



+886-4-23333817



yeoshe@yeoshe.com.tw



No.68, Wugong 1st Rd., Wufong Dist., Taichung City, Taiwan, 413



Improve Machining Accuracy

Extend Tool's Life

Reduce Machining Cost

High Machining Efficiency

CTS Coolant Throught Spindle High Pressure Water Pump



WG

WG	-	F	23	R	X	2B	V	-	A
0		1	2	3	4	5	6		7
☐		☐	☐	☐	☐	☐	☐		☐

0	MODEL
	WG

1	Mounting
	F: Flange Type

2	Displacement (cc/rev)
	20,23,25,28,32,36,40,45,50,55,60,70

3	Rotation
	R: Clockwise L: CCW

4	Shaft Type
	X: Key shaft Ø22.2mm X ₁ : Key shaft Ø25.4mm X ₂ : Key shaft Ø22mm X ₃ : Key shaft Ø25mm Y: Spline shaft 13T Z: Taper shaft

5	Flange Type
	2B: SAE 2-bolt

6	Seal
	V: Viton

7	Flange size
	A: SAE A B: SAE B

TWG

TWG	-	70	A	1	05M	N	-	****
0		1	2	3	4	5		6
☐		☐	☐	☐	☐	☐		☐

0	MODEL
	TWG

1	Max Pressure (kgf/cm ²)
	70 ~ 140


2	Outlet filtering
	A: Single B: Double

3	Inlet filtering
	1: 50L 2: 100L

4	Filtration level
	05M ~ 10M

5	Filter Pump
	N: Non 1: Attached

6	Design no.

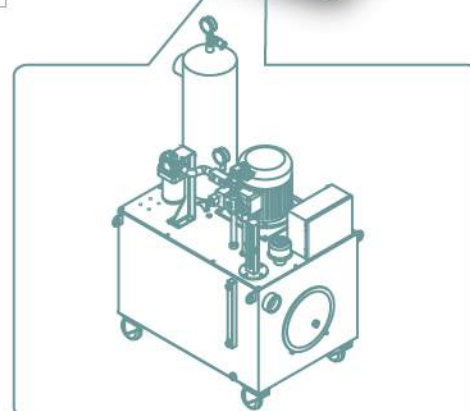

YEOSHE

www.yeoshehydraulic.com