

Vane Pump – VPE Series (VPE-F25 ~ VPE-F45)

※ Order Code



Model Name VPE - F 25 - A - 10
 Flange Type
 Displacement
 Pressure
 Design Code

Displacement:

25:25 l/min
 30:30 l/min
 35:35 l/min
 40:40 l/min
 45:45 l/min


Pressure Range:

A: 8~18 kgf/cm²
 B: 15~35 kgf/cm²
 C: 30~55 kgf/cm²
 D: 50~70 kgf/cm²

※ Specification


Model	Displacement	Pressure Range	Speed	Weight
VPE-F25-※-10	25 l/min	A: 08~18 kgf/cm ² B: 15~35 kgf/cm ² C: 30~55 kgf/cm ² D: 50~70 kgf/cm ²	Max:1800 Min:800	9.5kg
VPE-F30-※-10	30 l/min			
VPE-F35-※-10	35 l/min			
VPE-F40-※-10	40 l/min			
VPE-F45-※-10	45 l/min			

VPE-F25, VPE-F30, VPE-F40

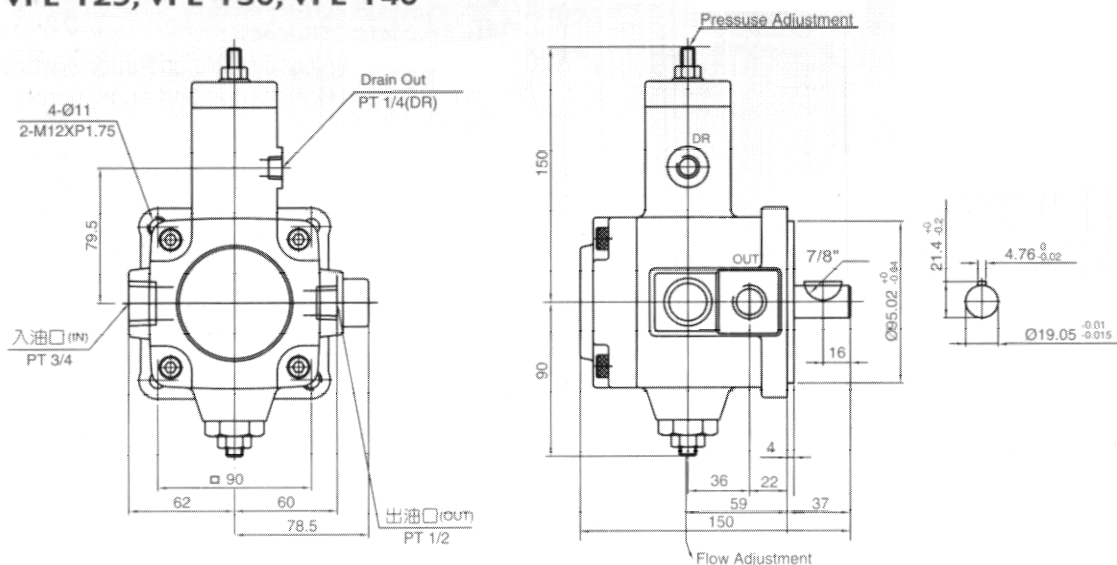


※ Performance

Series:VPE-F30※-10



Series:VPE-F40※-10



馬力參考曲線 Horsepower Referred to Curves

