

Gear Pump – HGP-3A Series



Model Name HGP- 3A - F 6 R - X-4BD
 Body Design
 Mounting
 Displacement
 Rotation
 Shaft Type
 Flange Type

Mounting:

F: Flange Type
 L: Foot Type

Rotation:

R: Clockwise
 L: CCW

Shaft Type:

X: Standard
 Y: Spline
 Z: Taper Shaft


Flange Type:

2B: SAE 2-bolt
 4BD: DIN 4-bolt

※ Specification

Model	Displacement	Pressure		Speed		Port Size	
		Work	Max.	Min	Max	Out	In
HGP-3A- ※ 6 ※	6 cc/rev	210 bar	250 bar	700	3000	PT3/4	PT1/2
HGP-3A- ※ 8 ※	8 cc/rev						
HGP-3A- ※ 11 ※	11 cc/rev			600			
HGP-3A- ※ 13 ※	13 cc/rev			400			
HGP-3A- ※ 14 ※	14 cc/rev						
HGP-3A- ※ 17 ※	17 cc/rev						
HGP-3A- ※ 19 ※	19 cc/rev						
HGP-3A- ※ 23 ※	23 cc/rev	140 bar	175 bar	400	3000	PT1	PT3/4
HGP-3A- ※ 25 ※	25 cc/rev						
HGP-3A- ※ 28 ※	28 cc/rev						
HGP-3A- ※ 30 ※	30 cc/rev						


※ Performance

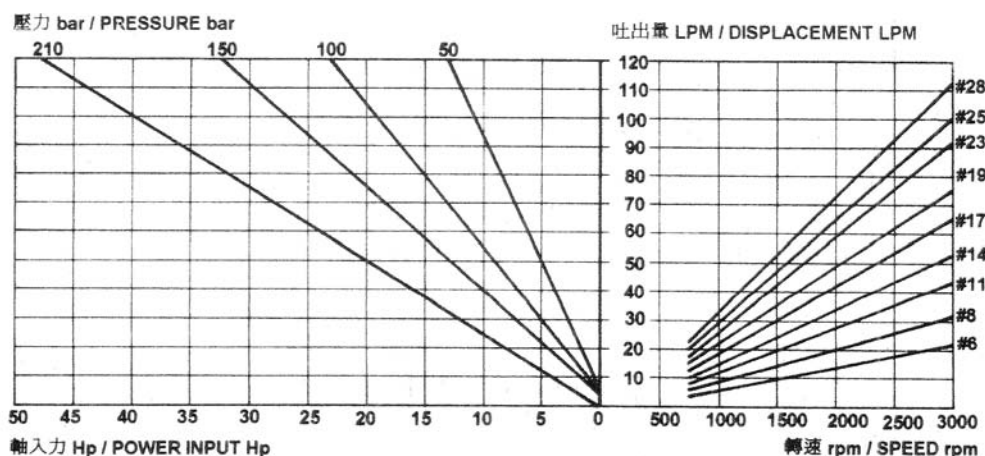


- Specifications and design are subject to change without notice

Gear Pump – HGP-3A Series

SAE 2-bolt

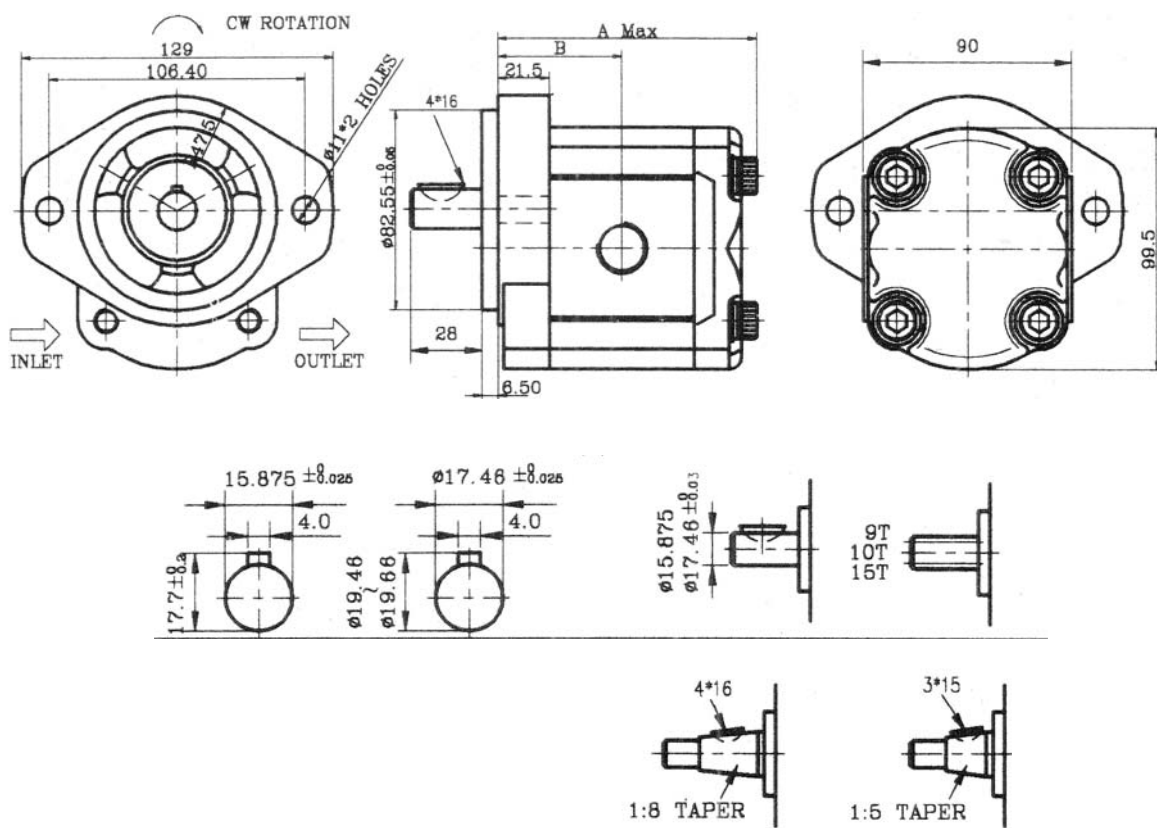

DIN 4-bolt

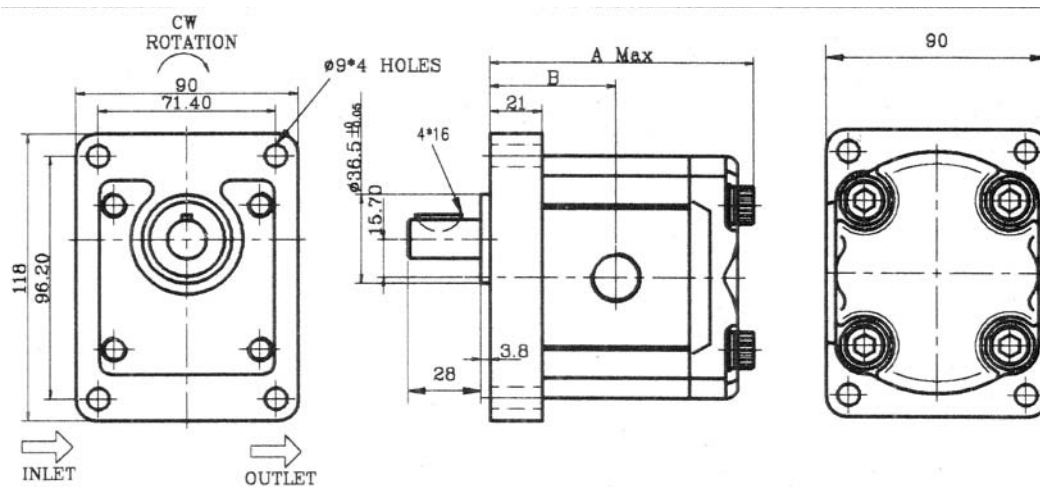

- Specifications and design are subject to change without notice