

YEOSHE HYDRAULICS CO., LTD.
following • improving • innovating



Hydraulic Machine

PRODUCTION TOOLS

液壓機械
生產設備工具機

www.yeoshehydraulic.com

YEOSHE[®]

Hydraulic Machine



www.yeoshehydraulic.com

Yeoshe not only manufactures hydraulic products, but also supplies hydraulic machines as one of trustworthy hydraulic equipment manufacturers and suppliers. And **Yeoshe** always insists consistently on providing good service and strict quality control.

Our hydraulic machines include vertical broaching machine, cold forging press machine, vertical shaper machine, punching press machine, high speed milling machines and oil filter cart. All of hydraulic machines processing and operating procedures have been certified with the ISO 9001-2008 to have a good knowledge of the market trends and meet the customer's needs.

Welcome to check following products and feel free to contact us for further questions.

Innovative Technology
Efficient Performance
Reliable Quality and Service



YEOSHE HYDRAULICS CO., LTD.

ABOUT YEOSHE

COMPANY PROFILE | YEOSHE

Founded in 1989, **YEOSHE** is a professional hydraulic manufacturer and designer of good-quality hydraulic pumps and machine in Taiwan. Endeavoring over 21 years, **YEOSHE** has established a reliable reputation in providing piston pump, gear & vane pump, hydraulic machine, power unit, hydraulic valve and others related components for both domestic and international markets.



YEOSHE HYDRAULICS CO., LTD.

YEOSHE hydraulics supplier will keep on servicing global partners with Innovative Technology, Efficient Performance, Reliable Quality products and Trustworthy Service! Sincerely, **YEOSHE** invites you to be our loyal partners and enjoy our services immediately; we will offer more than what you expect.

Additionally, **YEOSHE** hydraulics manufacturer not only insists on the strict and precise quality control to achieve customer's satisfaction, but also adopts advanced machine to strengthen the competitiveness. All of processing and operating procedures have been certified with the ISO 9001-2008 (ISO Quality Assurance Certification which covering the quality, management, and market demands) to have a good knowledge of the market trends and meet the customer's needs.



A10V Series Axial
Piston Pump



A10VSO Series Axial
Piston Pump



Cold Forging Press



Broaching Machine - 2 Rails

Innovative Technology
Efficient Performance
Reliable Quality and Service

YEOSHE BEST CHOICE
www.yeoshehydraulic.com

創新技術
高效率
值得信賴的品質和服務



關於 油昇油壓

COMPANY PROFILE | YEOSHE

創立於1989年，主要生產液壓閥、液壓工具與液壓泵維修及零組件代工。1991年鑑於了解研發技術的重要性，導入柱塞泵與閥類設計研發製造技術，成立液壓泵、液壓閥專業製造部門，以提昇液壓泵浦製造的專業性及技術性。1992年為滿足客戶在液壓機械及動力單元應用的需求，創立液壓機械部門，以專門製造油壓機械、手工具機械及系統的自動化機械為導向。2005年更成立液壓泵與閥類製造二廠，引進多種新穎設備與製程規劃。



YEOSHE HYDRAULICS CO., LTD.

油昇/油聖始終深信品質與技術不只是產品的生命，更是企業發展的根本。我們不時以戰戰兢兢的態度來提供客戶高品質的產品和最熱忱的服務。透過層層把關，以精準的品質政策，矢志提供給顧客最嚴謹的品質控管，**油昇**遵循「ISO品保認證」在品質技術、管理、市場的需求及顧客滿意所要求的目標，以凡事規劃準備，確實執行，反饋追蹤的品質政策，隨時掌握市場脈動，致力滿足客戶之需求，再以經濟、有成效的市場策略，達到交貨準時，顧客滿意、售後服務完善的目標。

油昇/油聖榮獲 ISO 9001:2008 檢驗認證通過，依循「品質管理系統」透過精良的生產設備執行嚴格的製程管理。首先，所有的產品均來自研發設計部門精心設計，透過精細的零件加工技術，以品保合格的零件加上純熟的組裝技術，從慎選零組件材質、鑄造、加工、鑽孔、銑床、研磨、組裝測試到噴漆等，經過嚴謹的測試程序以及接受良好教育訓練的工作團隊，配合十多年來豐富的經驗及專業技術來完成一系列的生產化過程。產品品質以達客戶的要求為根本，臻於突破技術成長的極限。多年來的努力，也已在競爭激烈的液壓市場，獲得實質的回饋與愛護。穩定成長的業績更說明了**油昇**在業界裡屹立不搖的地位。



A10V Series Axial
Piston Pump



A10VSO Series Axial
Piston Pump



Cold Forging Press



Broaching Machine - 2 Rails

Innovative Technology
Efficient Performance
Reliable Quality and Service

YEOSHE BEST CHOICE
www.yeoshehydraulic.com

Broaching Machines

YEOSHE HYDRAULICS CO., LTD.



油壓拉床 | 液壓拉床

Hydraulic Machine > Broaching Machines

Our one set double-unit of hydraulic broaching machines could operate high processing precision and precise positioning, it's suitable for many kinds of hand tool hardware and automobile parts.

Besides, our broaching equipment feature quick speed and easy operating. You can produce all kind of size that you need in one time and save the transporting time. Moreover, the pressure and speed can be adjusted freely by optional requirement of the users.

單軸下拉式內徑拉床-DL系列

Broaching Machines - DL Series



It is available for processing the following hand tools.



Broaching Machines
- DL



Broaching Machines
- DL

詳細說明 Specification

機械規格 Specification	DL-1000	DL-1300	DL-2050	DL-3000
行程 Stroke (mm)	1000	1300	2000	2980
上升速度(mm/sec) Cylinder lifting speed	0~488	0~326	0~300	0~280
下降速度(mm/sec) Cylinder descending speed	0~128	0~128	0~120	0~110
操作壓力(kg/cm ²) Operating pressure	30~140	30~140	30~140	30~140
最大出力噸數(噸) Capacity (ton)	12	15	17/20	20
電壓 Voltage	AC 220/380	AC 220/380	AC 220/380	AC 220/380
馬達 Motor (HP)	10HP	15HP	20/30HP	20/30HP
工作方向 Operating type	直立式 Vertical			
工作模式 Operating method	自動/手動/半自動 Auto/Manual / Semi Auto			
油容量(l) Oil Capacity	Approx. 500	Approx. 600	Approx. 800	Approx. 800
重量(kg) Weight	4200KG	4800KG	5200KG	6800KG
外型規格(mm) Size	1780*1920*4350	1780*1920*4950	2250*2050*6300	2250*2050*7500

單軸下拉式內徑拉床 / DL-1000

Broaching Machines - External

Model / DL-1000

DL Series - DL-1000 / DL-1300 / DL-2050 / DL-3000



1. 單軸滑座型機台，拉削精準不偏移。
 2. 適用各種零件之內徑齒拉削。
 3. 高低壓自動夾刀功能，可依刀具長度設定提刀行程。
 4. 省能源柱塞泵+高效率油路設計。
 5. 易操作、省工時、加工精度高。
 6. 主要適用於汽機車零配件、五金配件、手工工具等... 配件之 內孔精密拉削。
 7. 觸控式面板，客戶可依工件調整壓力及速度 節省時間，拉削壓力及速度均可配合工件快速調整，而拉刀工作行程均可依刀具長短作調整。
1. Single stroke machine, high precision broaching acting.
 2. Suitable for external broaching.
 3. High/Low pressure auto lifting broach function, available stroke adjustment depends on broach tooling.
 4. Adopting green saving piston pump, high efficiency design.
 5. Easy operation, saving time , high processing precision.
 6. Human interface PLC, speed and using pressure can be adjusted by customer. The broaching pressure and speed are adjustable and fitting with working pieces, moreover the stroke can be adjusted and fitting with broach tooling.
 7. Broaching applications for auto mobile components, hardware components, variable tooling components...and so on...

雙軸內徑拉床-M系列

Broaching Machines - M Series



It is available for processing the following hand tools.



Broaching Machines
- M Series



Broaching Machines
- M Series

詳細說明 Specification

機械規格 Specification	M10-530	M12-600	M15-600/800
行程 Stroke (mm)	530	600	600~800
上升速度(mm/sec) Cylinder lifting speed	329	0~316	0~310
下降速度(mm/sec) Cylinder descending speed	144	0~139	0~127
操作壓力(kg/cm ²) Operating pressure	140	30~140	30~140
電壓 Voltage	AC220/380	AC 220/380	AC 220/380
馬達 Motor (HP)	7.5HP	10HP	15HP
工作方向 Operating type	直立式 Vertical		
工作模式 Operating mothod	自動/手動 Auto/Manual		
油容量(l) Oil Capacity	800	800	900
重量(kg) Weight	2500KG	2900KG	3100KG
外型規格(mm) Size	1730*1970*2230	1730*1970*2800	1730*1970*2950

雙軸內徑拉床 / M

Broaching Machines - Inner Broaching

Model / M Series

M Series - M10 / M12 / M15




1. 機台為雙座型各自獨立雙軸型拉床，加工精度高，定位準確。
 2. 適合各種手工具，汽機車零件之內孔加工。
 3. 速度快，易操作，一次完成所需尺寸，減少搬運時間。
 4. 壓力及速度均可依所需工作自由調整。
1. One set of double-unit, high processing precision, and precise positioning.
 2. Suitable for many kinds of hand tool hardware, and automobile parts.
 3. Quick speed, easy to operate. You can produce all kind of size that you need in one time to save the time of transport.
 4. Pressure and speed can be adjusted freely by optional requirement of the users.

單軸平面拉床-YS系列

Broaching Machine - YS Series



It is available for processing the following hand tools.

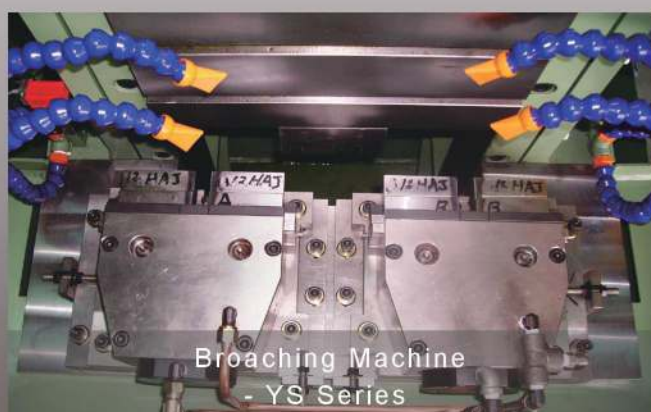

詳細說明 Specification

機械規格 Specification	YS-600 單軸	YS-800 單軸	YS-1000 單軸	YS-1200 單軸	YS-2000 單軸
行程 Stroke (mm)	600	800	1000	1200	2000
上升速度(mm/sec) Cylinder lifting speed	0~329				
下降速度(mm/sec) Cylinder descending speed	144				
操作壓力(kg/cm ²) Operating pressure	30~140				
電壓 Voltage	AC 220/380				
馬達 Motor (HP)	5HP	7.5HP	7.5/10HP	10HP	15/20HP
工作方向 Operating type	直立式 Vertical				
工作模式 Operating mothod	自動/手動 Auto/Manual				
油容量(l) Oil Capacity	450	450	500	500	500
重量(kg) Weight	2500KG	2500KG	3800KG	3800KG	5500KG
模寬(mm) Mold Size (L)*(W)	500*350				
工作台尺寸(mm) Work Table Size (L)*(W)	1270*520				
外型規格(mm) Size	1740*1900*2320	1740*1900*2520	1740*1900*2920	1740*1900*3420	2540*2350*4900

單軸平面拉床 / YS

Broaching Machines - External

Model / YS Series


YS Series - YS-600 / YS-800 / YS-1000 / YS-1200 / YS-2000



- | | |
|--|--|
| <ol style="list-style-type: none"> 適合各種零件之外徑齒不規則外型拉削，一次完成所需尺寸，省時省工。 速度快、精度高、定位準確。 壓力、速度均可依所需工件自由調整。 模具加工，送料均可依工件條件量身訂作。 易操作、省工時、加工精度高。 主要適用於汽機車零配件、五金配件、手工具等... 配件之內孔精密拉削。 | <ol style="list-style-type: none"> Suitable for external and any unequal shape broaching. Processing for all kind of required size in one time. High speed & precision, precise positioning. Pressure & speed are adjusted by work pieces requirement. Customer made machine / mold are acceptable. Easy operation, saving time, high processing precision. Broaching applications for auto mobile components, hardware components, variable tooling components...and so on... |
|--|--|

雙軸平面拉床-YS-2系列

Broaching Machines - YS-2 Series

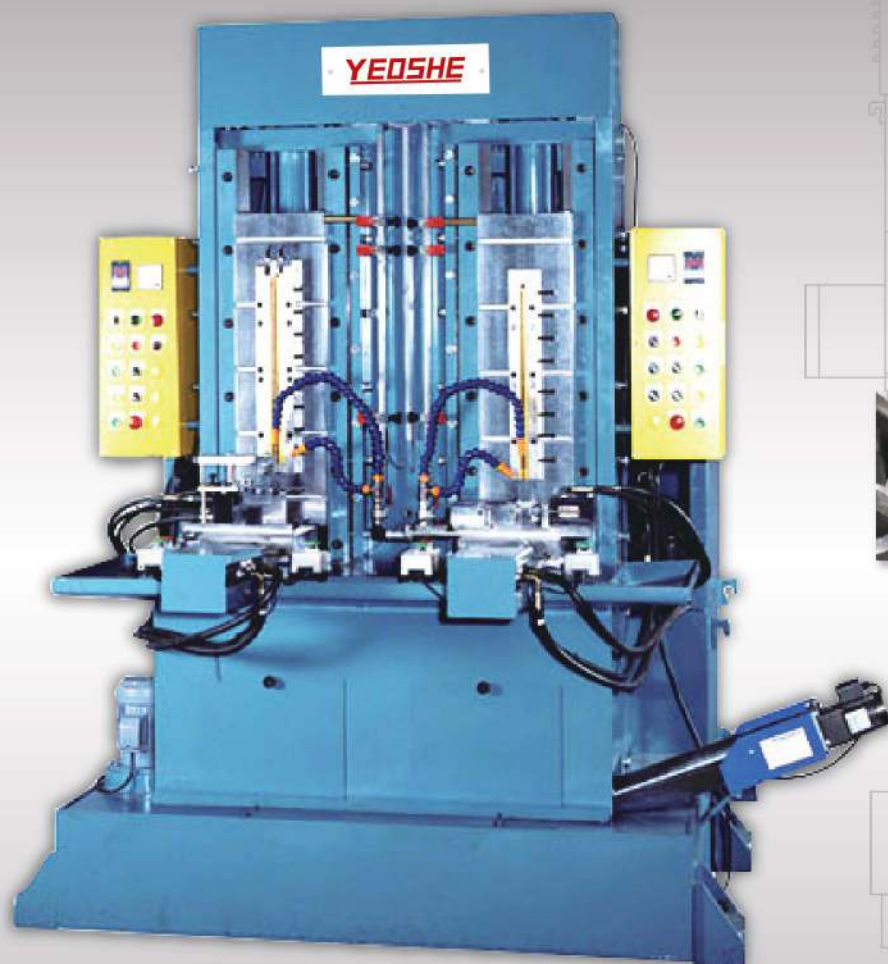

It is available for processing the following hand tools.



Broaching Machines
- YS Series



Broaching Machines
- YS Series

詳細說明 Specification

機械規格 Specification	YS-600-2 雙軸	YS-800-2 雙軸	YS-1000-2 雙軸	YS-1200-2 雙軸	YS-1600-2 雙軸
行程 Stroke (mm)	600	800	1000	1200	1600
上升速度(mm/sec) Cylinder lifting speed	0~329	0~329	0~329	0~329	0~306
下降速度(mm/sec) Cylinder descending speed	0~144	0~144	0~144	0~144	0~122
操作壓力(kg/cm ²) Operating pressure	30~140				
電壓 Voltage	AC 220/380				
馬達 Motor (HP)	5HP*2	7.5HP*2	7.5/10HP*2	10HP*2	15HP*2
工作方向 Operating type	直立式 Vertical				
工作模式 Operating mothod	自動/手動/半自動 Auto/Manual/Semi Auto				
油容量(l) Oil Capacity	600	800	800	800	1100
重量(kg) Weight	4500KG	5000KG	5500KG	6000KG	7500KG
模寬(mm) Mold Size (L)*(W)	430*350*2				
工作台尺寸(mm) Work Table Size (L)*(W)	1600*550				2000*550
外型規格(mm) Size	2150*2120*2180	2150*2120*2380	2150*2120*2780	2150*2120*3200	2450*2800*3980

雙軸平面拉床 / YS-2

Broaching Machines - 2 Rails

Model / YS-2 Series

YS SERIES - YS600-2 / YS800-2 / YS1000-2 / YS1200-2 / YS-1600-2



- | | |
|--|--|
| <ol style="list-style-type: none"> 1. 適合各種零件之外徑齒不規則外型拉削，一次完成所需尺寸，省時省工。 2. 速度快、精度高、定位準確。 3. 壓力、速度均可依所需工件自由調整。 4. 模具加工，送料均可依工件條件量身訂作。 5. 易操作、省工時、加工精度高。 6. 主要適用於汽機車零配件、五金配件、手工具等... 配件之內孔精密拉削。 | <ol style="list-style-type: none"> 1. Suitable for external and any unequal shape broaching. Processing for all kind of required size in one time. 2. High speed & precision , precise positioning. 3. Pressure & speed are adjusted by work pieces requirement. Customer made machine / mold are acceptable. 4. Easy operation, saving time , high processing precision. 5. Broaching applications for auto mobile components, hardware components, variable tooling components...and so on... |
|--|--|



油壓壓機 | 液壓壓機

Hydraulic Machine > Cold Forging Press


The stiffness structure, powerful slide seat design, high processing precision and long service life, these features make our hydraulic cold forging press machine unique. And its quick down function allows low speed shaping and high precision processing. The operator could also adjust the low/quick speed freely. Manual, auto, easy to change mold, accurate setting for pressure sensor, the specification of machine can also be customized according to user's requirements.

PLC數控壓機

Cold Forging Press - PLC



It is available for processing the following hand tools.

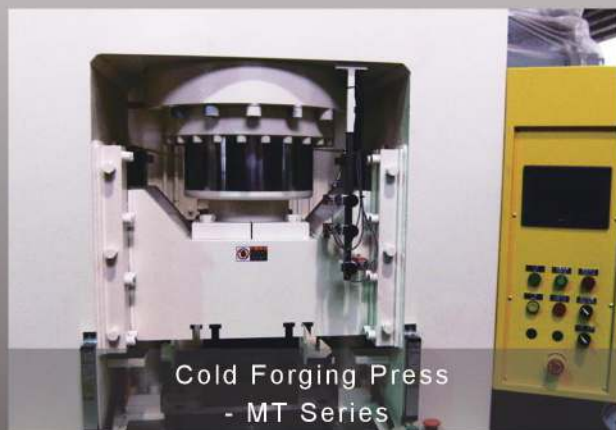

Cold Forging Press
- MT Series



Cold Forging Press
- MT Series

詳細說明 Specification

機械規格 Specification	MT-200	MT-300	MT-420	MT-600	MT-800	MT-1000	MT-1500
機台出力 Capability (ton)	200	300	400	600	800	1000	1500
行程 Stroke (mm)	200	150	170	200	200	200	200
上升速度(mm/sec) Cylinder lifting speed	150	157	138	157	158	135	139
下降速度(mm/sec) Cylinder descending speed	165	170	180	185	192	200	192
操作壓力(kg/cm ²) Operating pressure	210						
電壓 Voltage	AC 220/380						
馬達 Motor (HP)	15/20HP	20HP	25HP	25/30HP	30/40HP	40/50HP	40/50HP
工作方向 Operating type	直立式 Vertical						
工作模式 Operating mothod	自動/手動 Auto/Manual						
油容量(l) Oil Capacity	450	500	650	800	1000	1200	1500
重量(kg) Weight	4000KG	5500KG	8500KG	9500KG	17000KG	18500KG	2600KG

PLC數控壓機 / MT
Cold Forging Press - PLC
Model: MT Series
MT Series - MT200 ~ MT1500



1. 具快速下降，慢速成型，加工精度高。
快速、慢速可任意調整。
2. 手動、自動換模容易，壓力感應精度高。
3. 鋼性結構，強力滑座設計，加工精度高，壽命長。
4. 機械亦可依使用者工作條件量身訂作。

1. Quick down function, low speed shaping, and high processing precision.
Low/quick speed can be adjusted freely.
2. Manual, auto, easy to change mold, accurate setting for pressure sensor.
3. Stiffness structure, powerful slide seat design, high processing precision, and long service life.
4. Machine specification also can be designed by optional requirement of the user.

MEMO

[illegible]

Punch-hydraulic press

YEOSHE HYDRAULICS CO., LTD.



高速衝床 | 高速沖孔機

Hydraulic Machine > Punch-hydraulic press

Youshe manufactures kinds of punching and shaping machine such as hydraulic shaping machine, vertical shaping machine, hydraulic punching machine, manual punching machine and metal shaping machines.

Our shaft high speed press adopts PISTON high pressure pump which is high efficiency, electricity-saving, designed with single-unit or one set of double-unit, space-saving, and suitably used for on-line operation, hand tool processing and automobile parts drilling processing.

Besides, the specification of our products can also be designed according to user's requirements.

單柱高速沖床-MTK系列

Punch-hydraulic press - MTK Series



It is available for processing the following hand tools.



詳細說明 Specification

機械規格 Specification	MTK-25	MTK-60	MTK-80	MTK-100	MTK-125
機台出力 Capability (ton)	25	60	80	100	125
行程 Stroke (mm)	150~200	150~200	150~200	150~200	150~200
上升速度(mm/sec) Cylinder lifting speed	142	105/140	92/135	135	129
下降速度(mm/sec) Cylinder descending speed	152	100/135	90/130	121	118
操作壓力(kg/cm ²) Operating pressure	10~210				
電壓 Voltage	AC 220/380				
馬達 Motor (HP)	3/5 HP	10 HP	10 HP	15 HP	20 HP
工作方向 Operating type	直立式 Vertical				
工作模式 Operating mothod	自動/手動 Auto/Manual				
油容量(l) Oil Capacity	120	400	500	650	800
重量(kg) Weight	1500KG	2500KG	2650KG	3100KG	3300KG
外型規格(mm) Size	1010*1150*1630	1050*1350*1800	1150*1450*1860	1340*1900*2250	1540*1900*2250

單柱高速沖床 / MTK

Punch-hydraulic press

Model / MTK Series

MTK Series - MTK-25 / MTK-60 / MTK-80 / MTK-100 / MTK-125



1. 單軸高速沖孔機採用PLC高壓泵浦，高效率、省電、省工時，單機或一台雙機，適合連線作業，省空間，適用手工工具加工製造，汽機車零件沖床加工。

2. 機械亦可依使用者工作條件量身訂做。

1. Shaft high speed press adopts PISTON high pressure pump, high efficiency, electricity-saving, designed with single-unit or one set of double-unit, suitably used for on-line operation, space-saving, and suitably used for hand tool processing and automobile parts drilling processing, etc.

2. Machine specification also can be designed by optional requirement of the users.

雙軸高速沖孔機-MTKx2系列

Punch-hydraulic press - MTKx2 Series



It is available for processing the following hand tools.



Punch-hydraulic press
- MTK x 2 Series



Punch-hydraulic press
- MTK x 2 Series

詳細說明 Specification

機械規格 Specification	MTK-60x2	MTK-80x2	MTK-100x2
機台出力 Capability (ton)	60	80	100
行程 Stroke (mm)	120~200	120~200	120~200
上升速度(mm/sec) Cylinder lifting speed	117	110	121
下降速度(mm/sec) Cylinder descending speed	141	130	135
操作壓力(kg/cm ²) Operating pressure	20~210		
電壓 Voltage	AC 220/380		
馬達 Motor (HP)	10 HP	10 HP / 15 HP	15 HP
工作方向 Operating type	直立式 Vertical		
工作模式 Operating mothod	自動/手動 Auto/Manual		
油容量(l) Oil Capacity	800	800	1200
重量(kg) Weight	3200KG	3700KG	5500KG

雙軸高速沖孔機 / MTKx2

Punch-hydraulic press

Model / MTKx2 Series

MTKx2 Series - MTK60x2 / MTK80x2 / MTK100x2



1. 雙軸高速沖孔機採用PLC高壓泵浦，高效率、省電、省工時，單機或一台雙機，適合連線作業，省空間，適用手工工具加工製造，汽機車零件沖床加工。
2. 機械亦可依使用者工作條件量身訂做。

1. Dual-shaft high speed press adopts PISTON high pressure pump, high efficiency, electricity-saving, designed with single-unit or one set of double-unit, suitably used for on-line operation, space-saving, and suitably used for hand tool processing and automobile parts drilling processing, etc.
2. Machine specification also can be designed by optional requirement of the users.

多軸高速沖孔機-MTKx3系列

Punch-hydraulic press - MTKx3 Series



It is available for processing the following hand tools.



Punch-hydraulic press
- MTK x 3 Series



Punch-hydraulic press
- MTK x 3 Series

詳細說明 Specification

機械規格 Specification	MTK-60x3	MTK-80x3
機台出力 Capability (ton)	60	80
行程 Stroke (mm)	120	
上升速度(mm/sec) Cylinder lifting speed	117	110
下降速度(mm/sec) Cylinder descending speed	141	130
操作壓力(kg/cm ²) Operating pressure	20~210	
電壓 Voltage	AC 220/380	
馬達 Motor (HP)	10 HP	10 HP/ 15 HP
工作方向 Operating type	直立式 Vertical	
工作模式 Operating mothod	自動/手動 Auto/Manual	
油容量(l) Oil Capacity	1000	1000
重量(kg) Weight	4000KG	4300KG

多軸高速沖孔機 / MTKx3

Punch-hydraulic press

Model / MTKx3 Series

MTKx3 Series - MTK60x3 / MTK80x3



1. 多軸高速沖孔機採用PISTON高壓泵浦，高效率、省電、省工時，適合連線作業，省空間，是用手工具加工製造，汽機車零件沖孔加工等。
2. 機械亦可依使用者工作條件量身訂作。

1. Vertical and high strength structure. Available for punching, pressing, leveling and shaping. High efficiency and energy saving
2. Machine specification also can be designed by optional requirement of the users.

四柱油壓機-MF系列

Cold Forging Press - MF Series



Cold Forging Press
-MF



It is available for processing the following hand tools.



Cold Forging Press
-MF



Cold Forging Press
-MF



Cold Forging Press
-MF

詳細說明 Specification

機械規格 Specification	MF			
機台出力 Capability (ton)	2	5	10	15
行程 Stroke (mm)	200~600 均可選購 200~600 is open to choose			
上升速度(mm/sec) Cylinder lifting speed	30~180 依工作需求 30~180 According to working conditions.			
下降速度(mm/sec) Cylinder descending speed	10~140 依照工作需求 10~140 According to working conditions.			
電壓 Voltage	AC220/380			
馬達 Motor (HP)	2HP	3HP	5HP	7.5HP
工作方向 Operating type	直立式 Vertica			
工作模式 Operating mothod	自動/手動 Auto/Manual			
油容量(l) Oil Capacity	60	60	100	100
外型規格(mm) Size	可依客戶所需做設計 Can be designed by customer request.			

四柱油壓機 / MF 系列

Cold Forging Press

Model / MF Series



1. 此機台可依工作大小作出力及速度的調整
 2. 可搭配自動送料機做自動加工，以減少人力成本。
 3. 適合沖壓各種汽機車，及手工具等小型零件。
 4. 操作簡單，維修容易，穩定性高。
 5. 機械亦可依使用者工作條件量身訂作。
1. MF series can easily operate according to working pressure and speed to reducing the cost.
 2. Suitable for all kinds of mobile parts and hand tool hardware.
 3. Easy to operate and repair, also with high stability.
 4. Machine specification also can be designed by working conditions.




銑扁機 | 銑槽機

Hydraulic Machine > Milling Machine

Youshe has been cultivating in the field of milling machines for more than 20 years since its establishment in 1989, currently it provides vertical milling machines, horizontal milling machine, high speed milling machines and hydraulic milling machine...etc. For the specification of our products, please click on the following pictures or contact directly.

雙軸銑槽機-GB

Hydraulics Milling Machine - GB

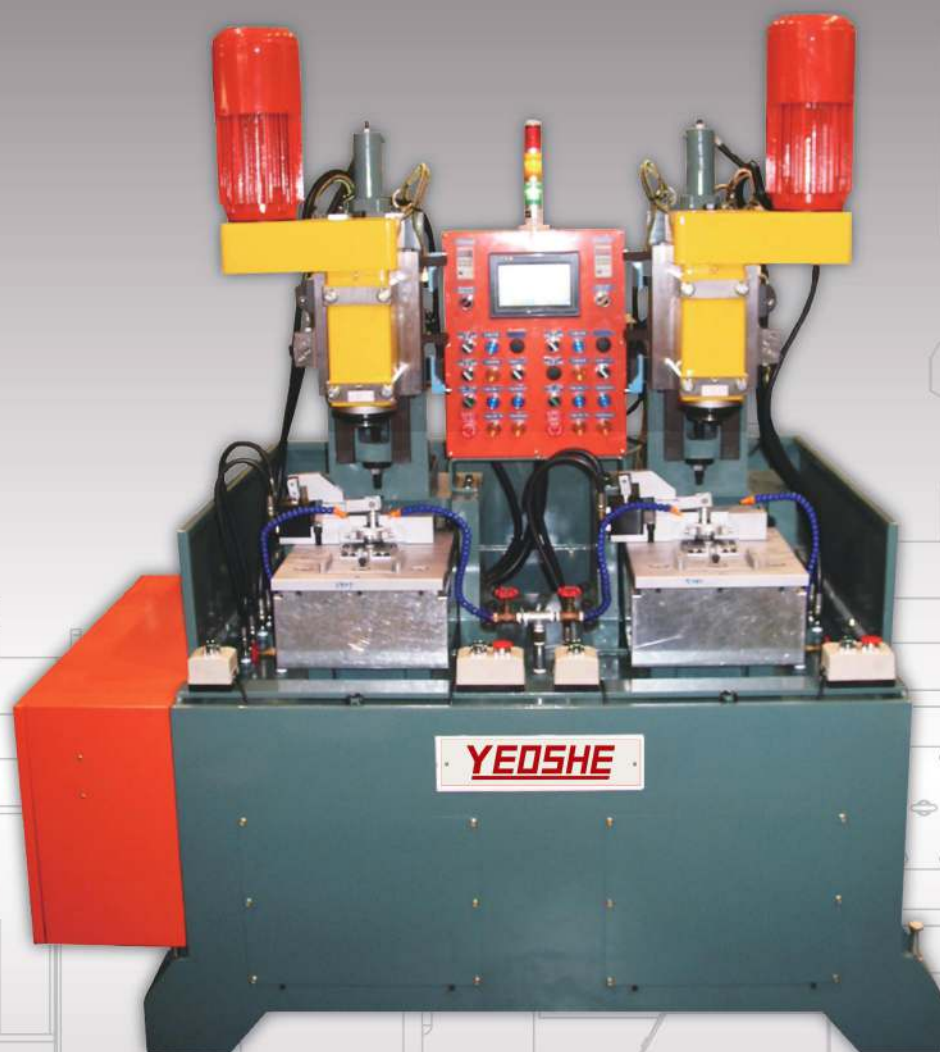

It is available for processing the following hand tools.



Hydraulics Milling Machine
- GB



Hydraulics Milling Machine
- GB

詳細說明 Specification

機械規格 Specification	GB-10-2
適用板手 Spanner aize (mm)	棘輪板手溝槽及Y軸、Z軸之槽孔
切削行程(mm) Stroke	50
前進速度(mm/sec) Forward speed	135
後退速度(mm/sec) Backward speed	135
伺服馬達 Servo moter	1HP/1.5HP
馬達 Motor (HP)	2HP*2
工作方向 Operating type	直立式 Vertica
工作模式 Operating mothod	自動/手動 Auto/Manual
油容量(l) Oil Capacity	200
重量(kg) Weight	3100KG
外型規格(mm) Size	2030*1700*2120

雙軸銑槽機 / GB 系列

Hydraulics Milling Machine
Model / GB Series



- | | |
|--|--|
| <ol style="list-style-type: none"> 1. 此機種適合工具、五金、汽車零件生產之各種Y軸、Z軸槽孔。 2. 速度快，定位高，設定容易。 3. 定位準確，精度高，可設定達到0.01mm之精度。 4. 使用人機介面控制，操作簡易。 5. 一般作業人可自行設定，無需學習程式設定。 | <ol style="list-style-type: none"> 1. Suitable for manufacture groove and hole of various industry. 2. Ex. Tool, hardware, automobile components. 3. High speed, precise positioning, setting easy. 4. High correct setting & processing precision, high precision performance which can reach to 0.01mm. 5. Human-Computer interaction control, easy operation. 6. Operation can set by labors, no need to learn programming setting. |
|--|--|

單軸銑槽機-GB

Milling machine - GB



It is available for processing the following hand tools.



詳細說明 Specification

機械規格 Specification	GB-10-S
適用板手 Spanner aize (mm)	棘輪板手溝槽及Y軸、Z軸之槽孔
切削行程(mm) Stroke	50
前進速度(mm/sec) Forward speed	135
後退速度(mm/sec) Backward speed	135
伺服馬達 Servo moter	1HP/1.5HP
馬達 Motor (HP)	2HP
工作方向 Operating type	直立式 Vertica
工作模式 Operating mothod	自動/手動 Auto/Manual
油容量(l) Oil Capacity	100
重量(kg) Weight	1800KG
外型規格(mm) Size	1300*1400*2020

單軸銑槽機 / GB 系列

Milling machine
Model / GB Series



- | | |
|--|--|
| <ol style="list-style-type: none"> 1. 此機種適合工具、五金、汽車零件生產之各種Y軸、Z軸槽孔。 2. 速度快，定位高，設定容易。 3. 定位準確，精度高，可設定達到0.01mm之精度。 4. 使用人機介面控制，操作簡易。 5. 一般作業人可自行設定，無需學習程式設定。 | <ol style="list-style-type: none"> 1. Suitable for manufacture groove and hole of various industry. 2. Ex. Tool, hardware, automobile components. 3. High speed, precise positioning, setting easy. 4. High correct setting & processing precision, high precision performance which can reach to 0.01mm. 5. Human-Computer interaction control, easy operation. 6. Operation can set by labors, no need to learn programming setting. |
|--|--|

臥式銑槽機-GA Milling machine - GA



It is available for processing the following hand tools.



Milling Machine
- GA



Milling Machine
- GA



Milling Machine
- GA

詳細說明 Specification

機械規格 Specification	GA-10
適用尺寸 Spanner aize (mm)	6"8"10"12
切削行程(mm) Stroke	50
前進速度(mm/sec) Forward speed	100
後退速度(mm/sec) Backward speed	100
伺服馬達 Servo moter	1HP
馬達 Motor (HP)	3HP
工作方向 Operating type	水平式 Horizontal
工作模式 Operating mothod	自動/手動 Auto/Manual
油容量(l) Oil Capacity	150
重量(kg) Weight	3750KG
外型規格(mm) Size	2000*2900*2500

臥式銑槽機 / GA 系列
Milling Machine
Model / GA Series



- | | |
|---|--|
| <ol style="list-style-type: none"> 1. 此機種適合工具、五金、汽車零件生產之各種槽孔。 2. 速度快，定位高，設定容易。 3. 定位準確，精度高，可設定達到0.01mm之精度。 4. 使用人機介面控制，操作簡易。 5. 一般作業人可自行設定，無需學習程式設定。 | <ol style="list-style-type: none"> 1. Suitable for manufacture groove and hole of various industry. 2. Ex. Tool, hardware, automobile components. 3. High speed, precise positioning, setting easy. 4. High correct setting & processing precision, high precision performance which can reach to 0.01mm. 5. Human-Computer interaction control, easy operation. 6. Operation can set by labors, no need to learn programming setting. |
|---|--|

[illegible]



高效率濾油車

Hydraulic Machine > Portable Filter Cart

The hydraulic portable filter cart of Youshe's has high performance filtering unit which is designed with inlet and outlet tube. It doesn't need special tools to proceed the oil filtering work and it's easy to move and clean the filtering net with convenient access.

Plus, the oil filtering unit is equipped with pollution indicator and the filtering element is sufficient and low-costing. moreover, the hand-push design of our product is easy to carry and space-saving; adopts big-capacity filtering net area has best purifying effect.

高效率濾油車-FC

Portable Filter Cart - FC



詳細說明 Specification

型號 Model	FC-10	FC-25
標準過濾精度 Mesh	10目	25目
流量 Flow (LPM)	20 l/min	40 l/min
電壓 Voltage	110V/220V/380V	

高效率濾油車 / FC

Portable Filter Cart

Model / FC

- 高效率濾油車配有進出油管，無需特殊工具，便能進行濾油工作，移動方便、濾網清潔、更新方便容易。
 - 濾油器附有污染指示器。
 - 濾蕊充分，低價供應。
 - 推車型設計，搬運容易，不佔空間。
1. With inlet & outlet tube for oil clean rapidly.
 2. Mobile design is for easy move and spave saving.
 3. Oil filter changes easily and conveniently.

YEOSHE[®]

Hydraulic Machine



www.yeoshehydraulic.com

YEOSHE除了生產油泵、液壓相關產品，也是生產液壓機械的製造商和供應商之一。**YEOSHE**提供良好的服務和嚴格品質的始終是我們的堅持。

我們的液壓機包括立式油壓拉床、冷鍛成形壓字機、立式成型機、高速沖孔機、各式銑槽機和濾油車。所有的液壓機械都依據市場趨勢和滿足客戶的需求，並且提供量身訂製。

歡迎隨時聯繫我們獲取更多的資訊。

Hydraulic Machine

PRODUCTION TOOLS



油昇油壓股份有限公司

413 台灣台中市霧峰區霧工一路68號
No.68, Wugong 1st Rd., Wufong Dist., Taichung City, Taiwan, 413
www.yeoshehydraulic.com

經銷商 Distributor

台灣 Taiwan

TEL | +886-4-23332339

FAX | +886-4-23333817

E-mail | yeoshe@yeoshe.com.tw

東莞辦事處 Dongguan

TEL | +86-769-85965158

FAX | +86-769-81635359

E-mail | yeoshe@yeoshe.com.tw

上海辦事處 Shanghai

TEL | +86-21-69785786

FAX | +86-21-69785787

E-mail | yeoshe@yeoshe.com.tw

Copyright © 2016 by YEOSHE
All rights reserved.