




V23A,V25A Pressure Compensator 標準壓力補償控制

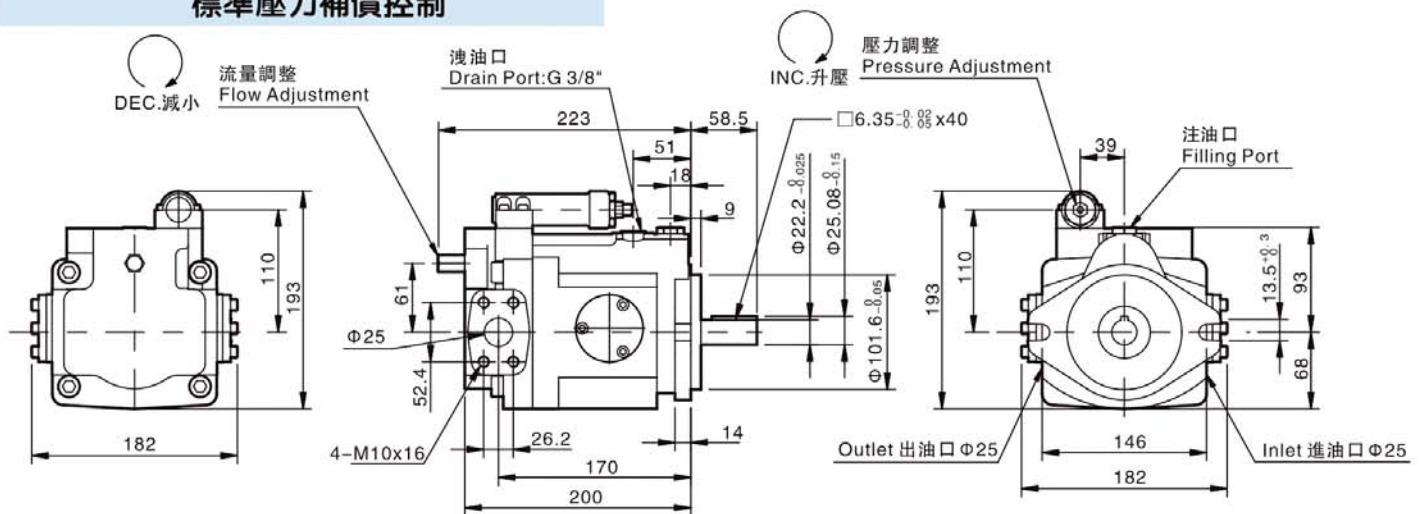


V23B,V25B Multi-stage Flow&Single-stage Pressure Compensator Control(With Cylinder) 無段變速,靠外接油壓缸,流量可任意變化控制

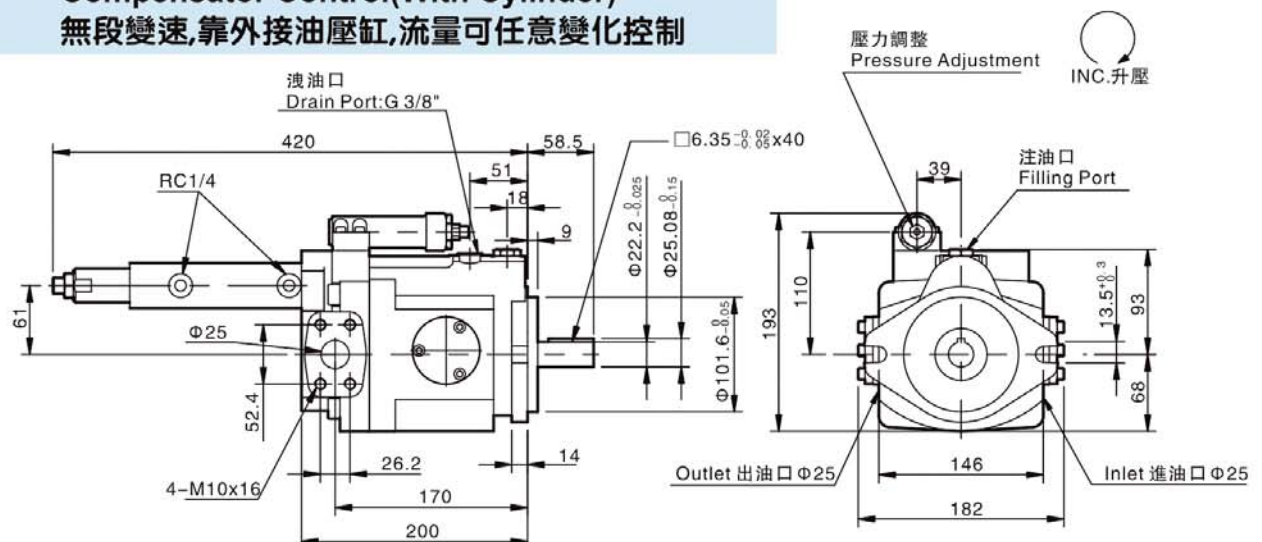


V23C,V25C 2-stage Pressure&Flow Control Type 兩段壓力,兩流量控制(自壓式)

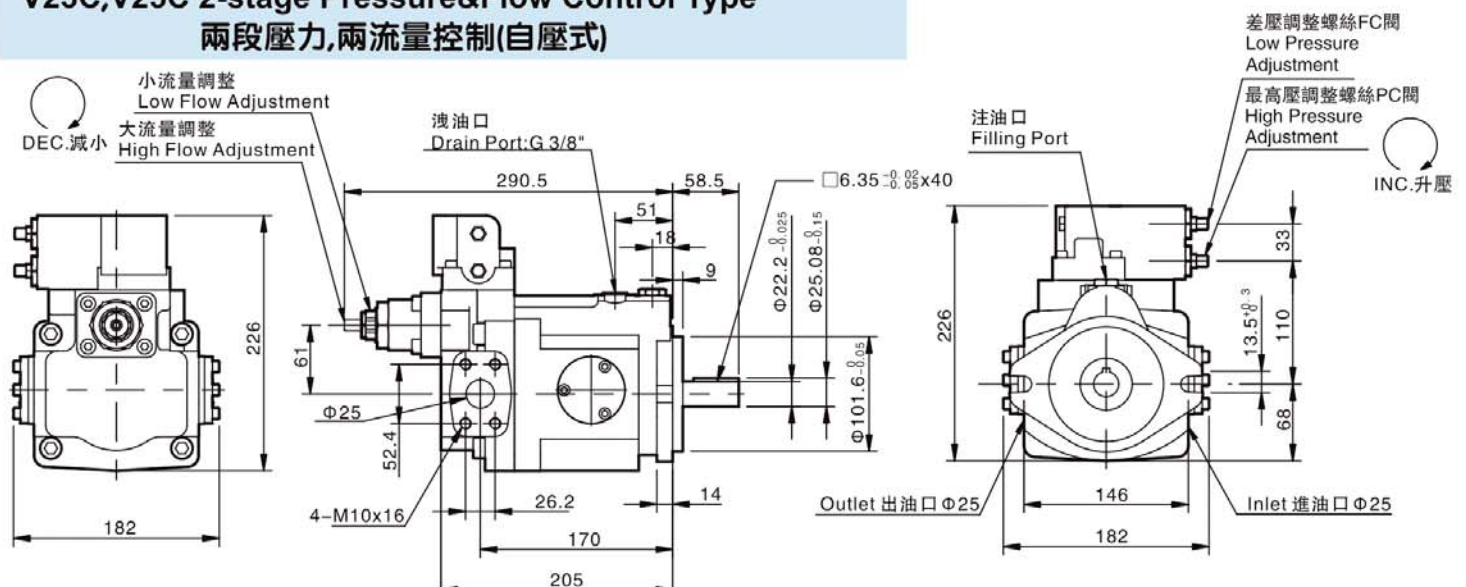


V23CG,V25CG 2-stage Pressure&Flow Control Type with Remote 兩段壓力,兩流量控制+遙控(自壓式)

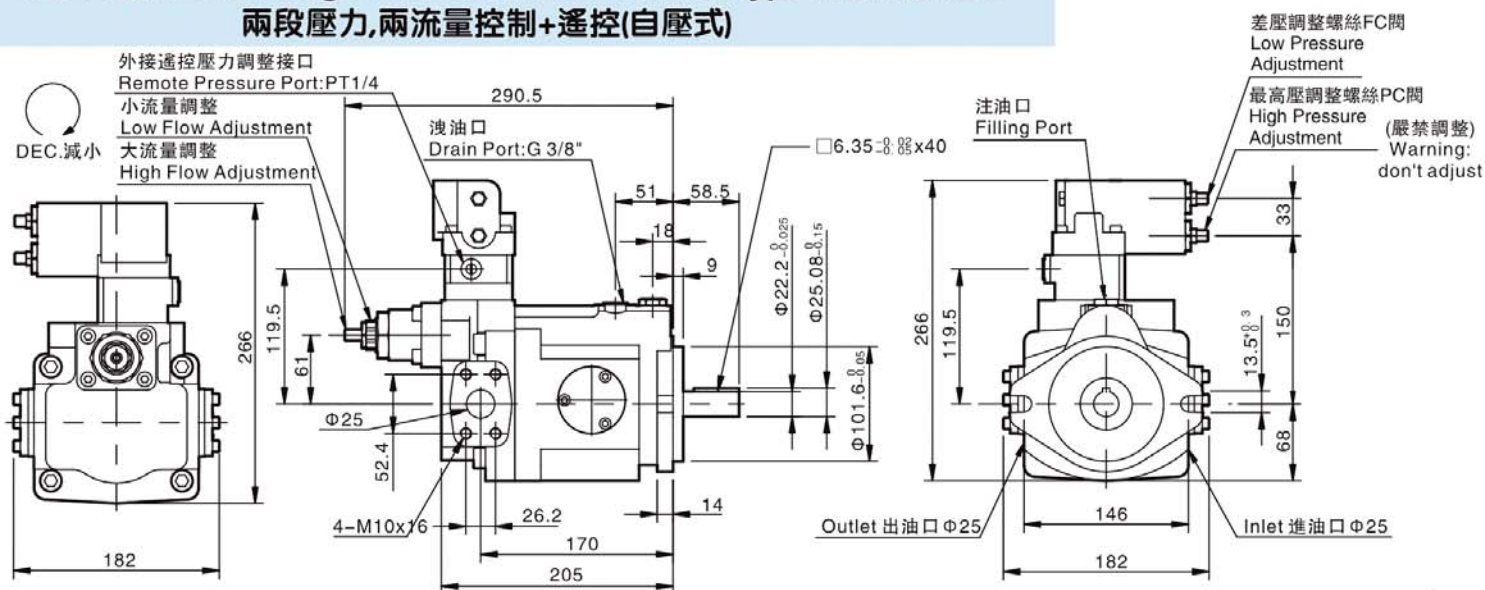


V23D,V25D Solenoid Controlled Pressure Compensating Type With Unloading Device 低壓卸載,壓力補償控制

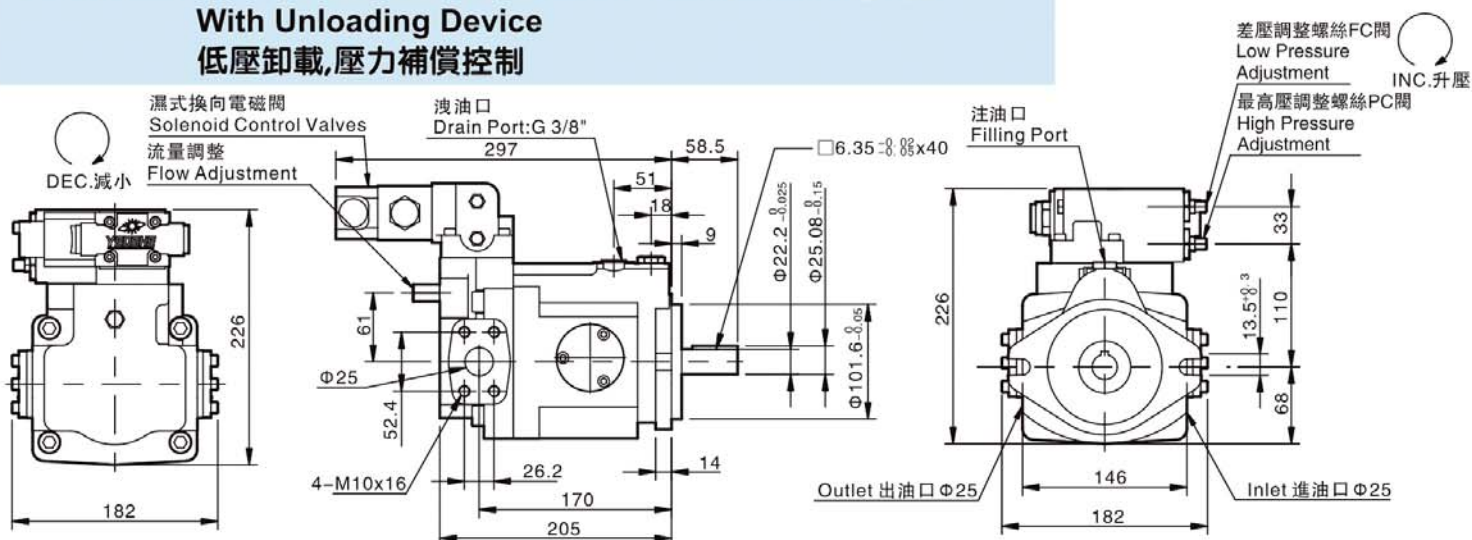


V23DG,V25DG Solenoid Controlled Pressure Compensating Type With Unloading Device & Remote 遙控低壓卸載,壓力補償控制

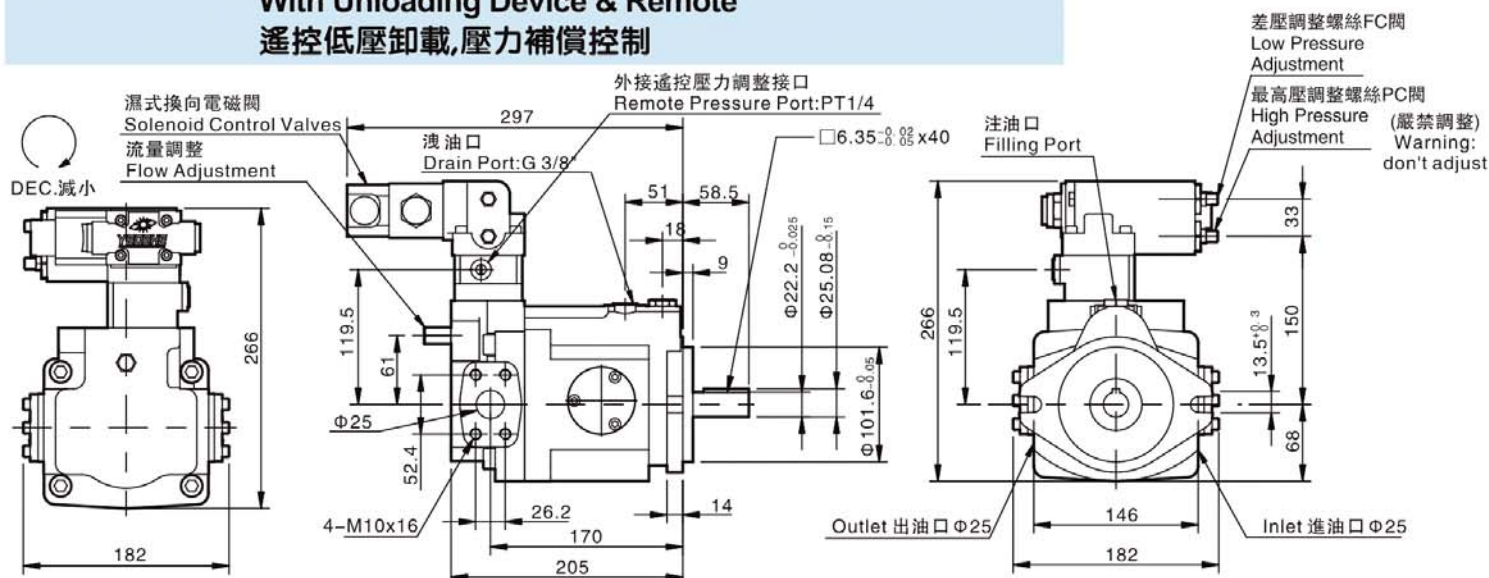


V23E,V25E Dual Pressure Control 電控兩段壓力補償控制

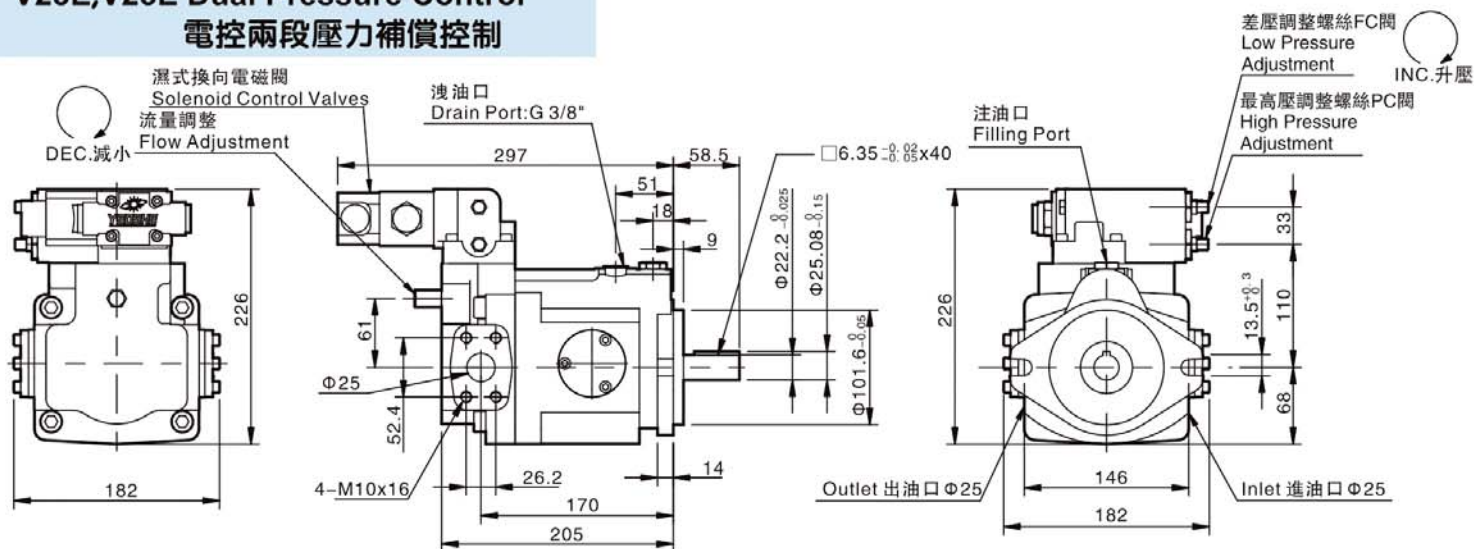


V23EG,V25EG Dual&Remote Pressure Control 電控遙控兩段壓力補償控制

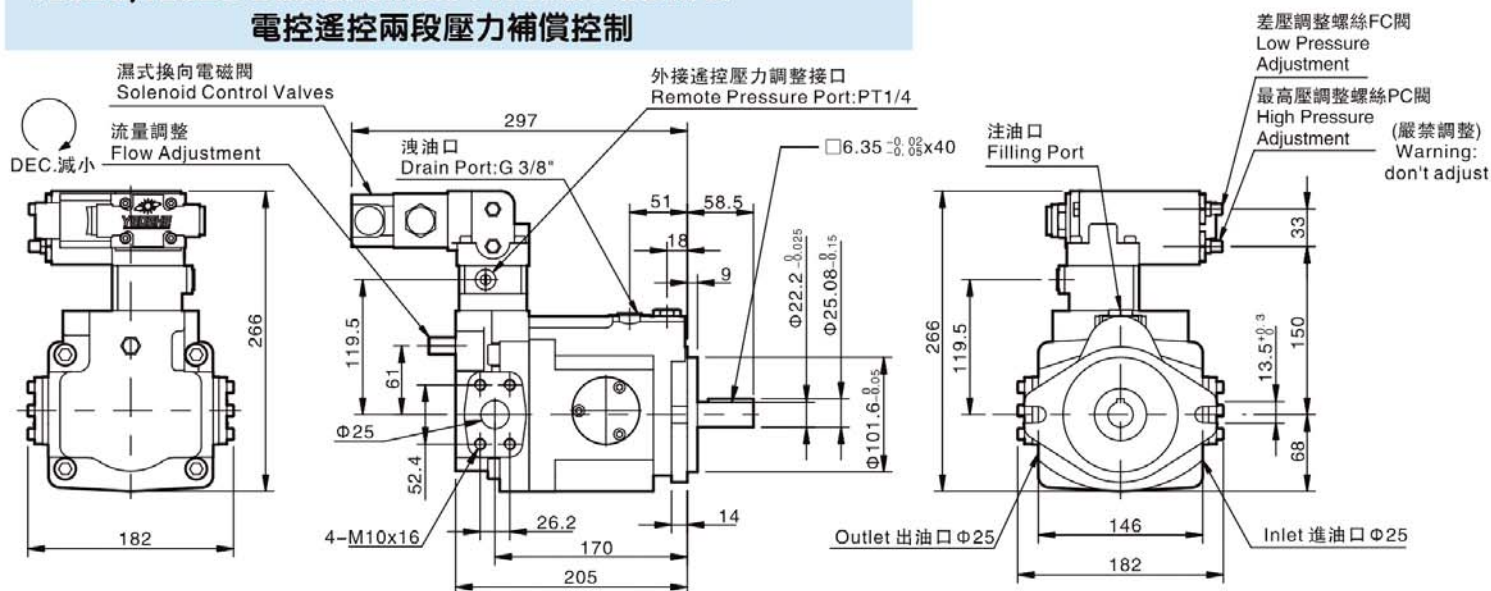


V23F,V25F 2 Flow-2 Pressure Control by Solenoid Operated Valve 電控兩段壓力,兩段流量控制

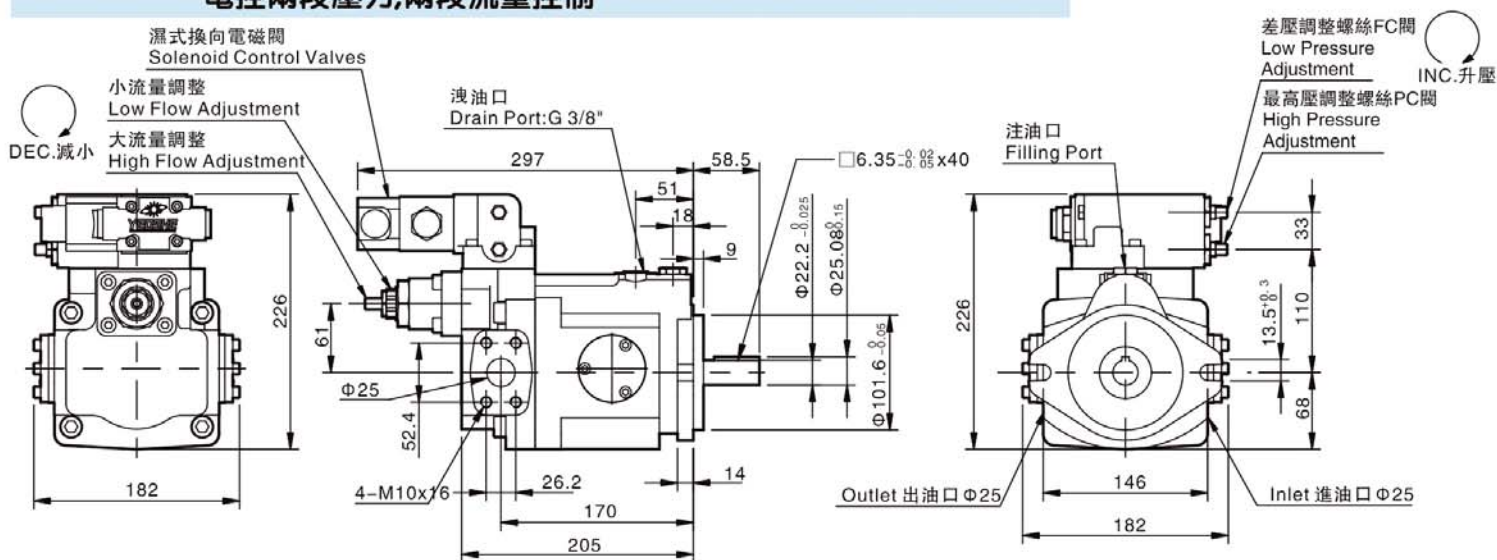


V23FG,V25FG 2 Flow-2 Pressure Control by Solenoid Operated & Remote Valve 電控遙控兩段壓力,兩段流量控制

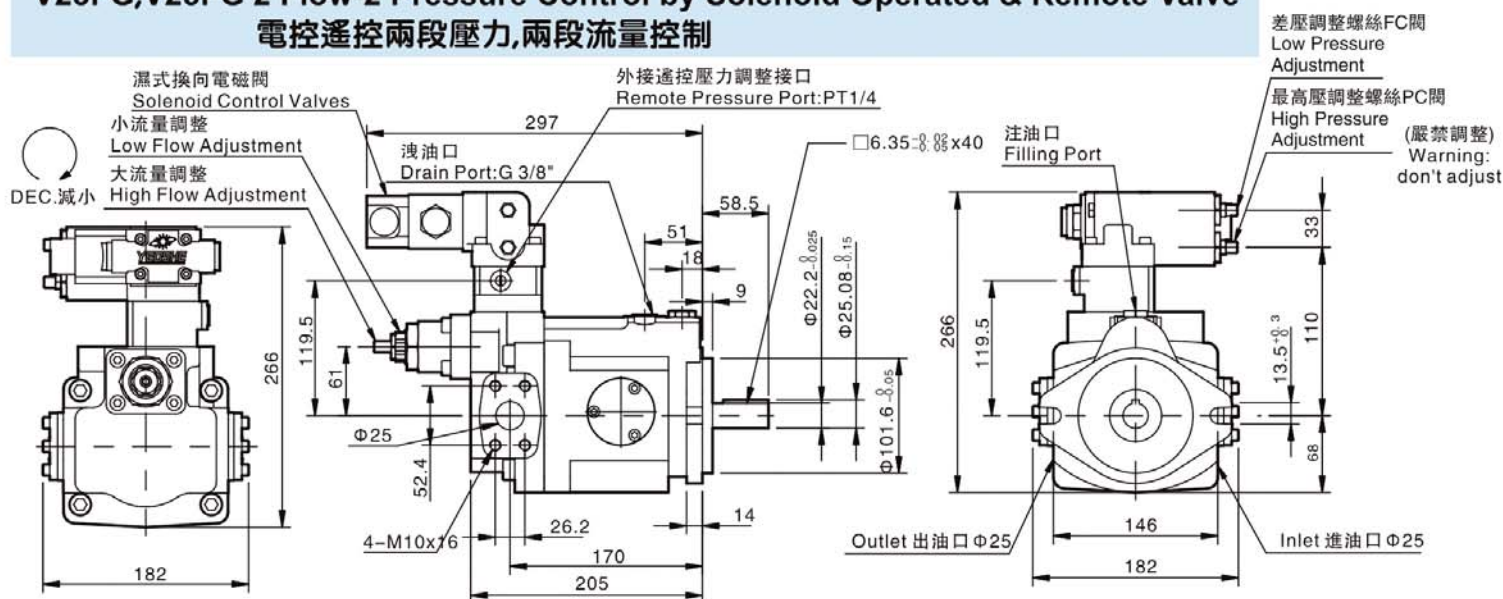


V23G,V25G Remoted Pressure Compensator Control 遠程遙控兩段壓力補償控制

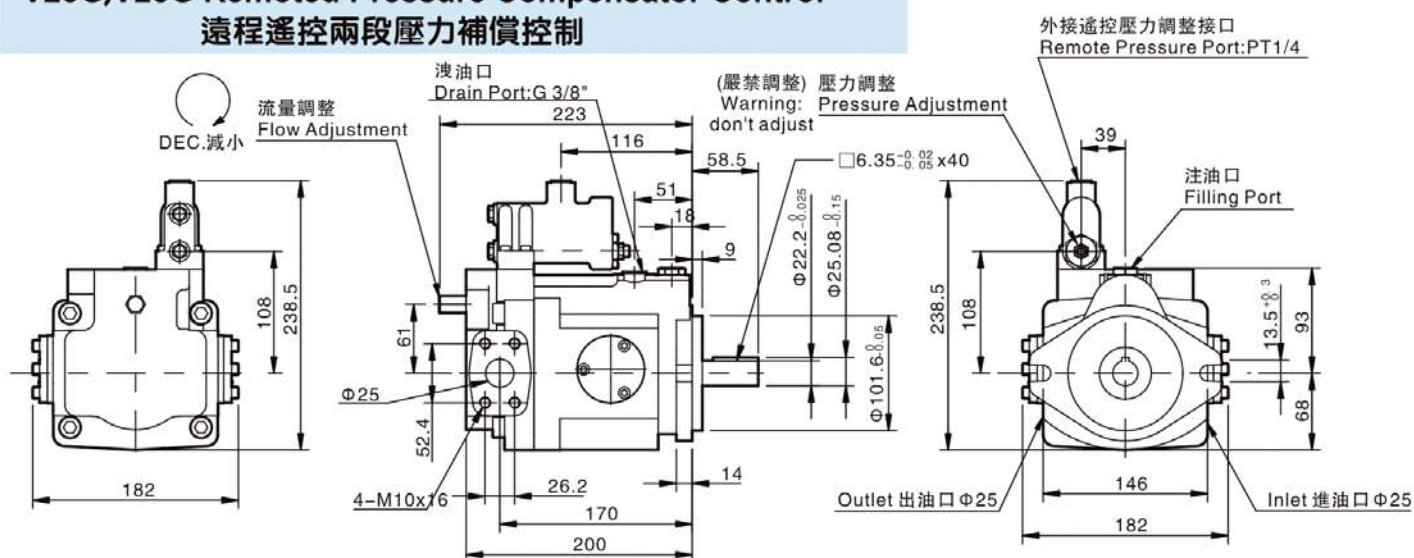


V23GJ,V25GJ Proportional Pressure with interface 層式比例壓力控制

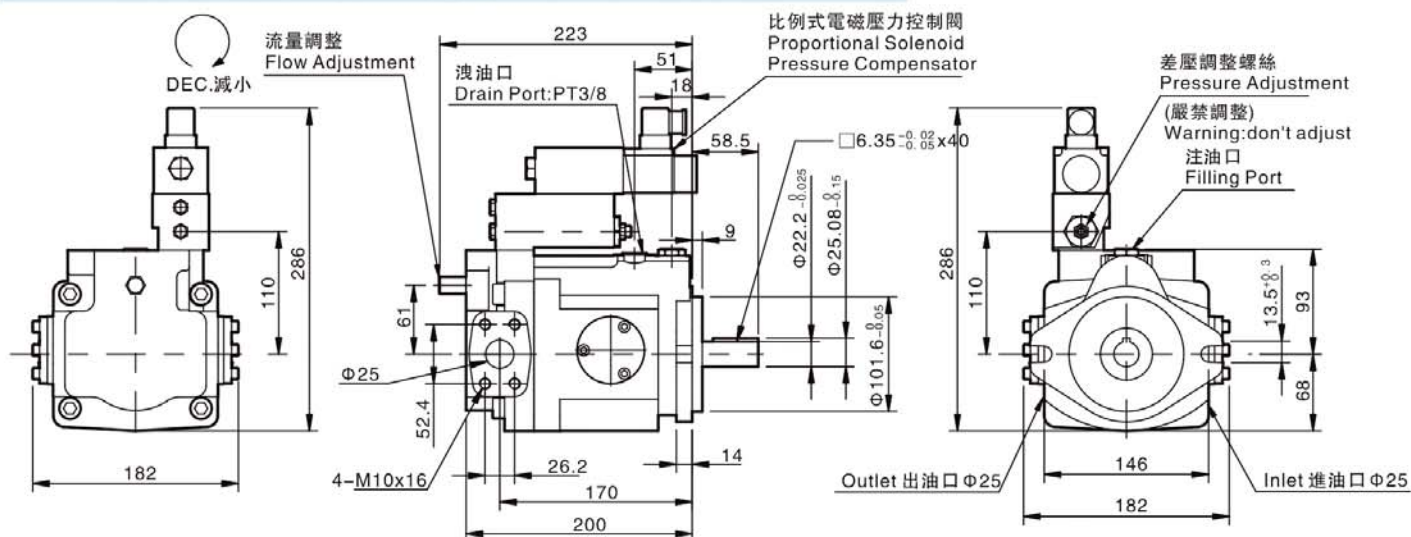


V23GM,V25GM Remoted Interface(Not include valve) 層式遙控控制(不含調壓閥)

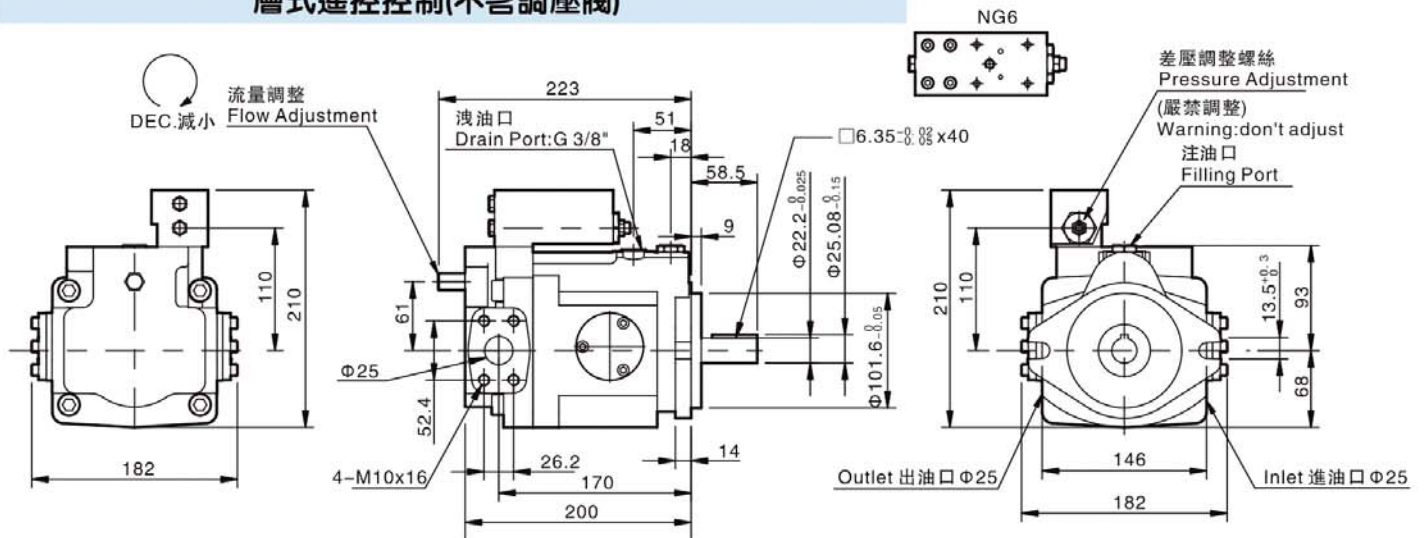


V23HL,V25HL Load-sensing Compensator 負載感應控制

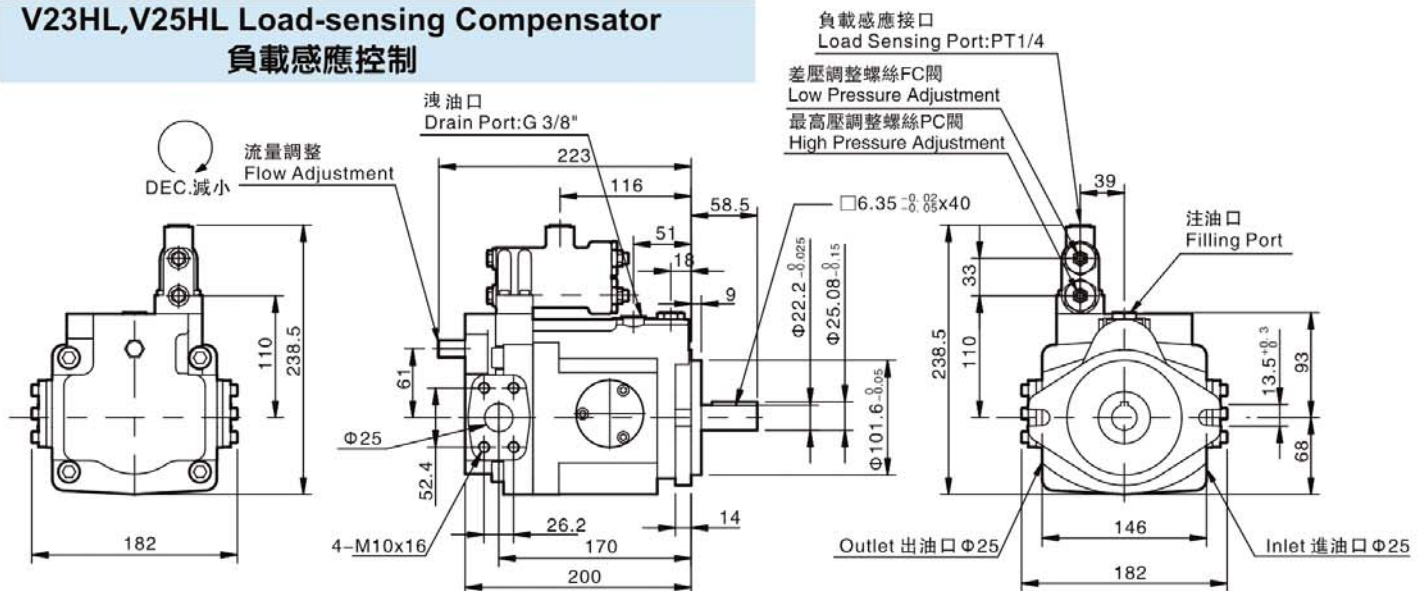

V23HK,V25HK Proportional Electro-hydraulic Load sensing Type 負載感應+比例壓力比例流量控制

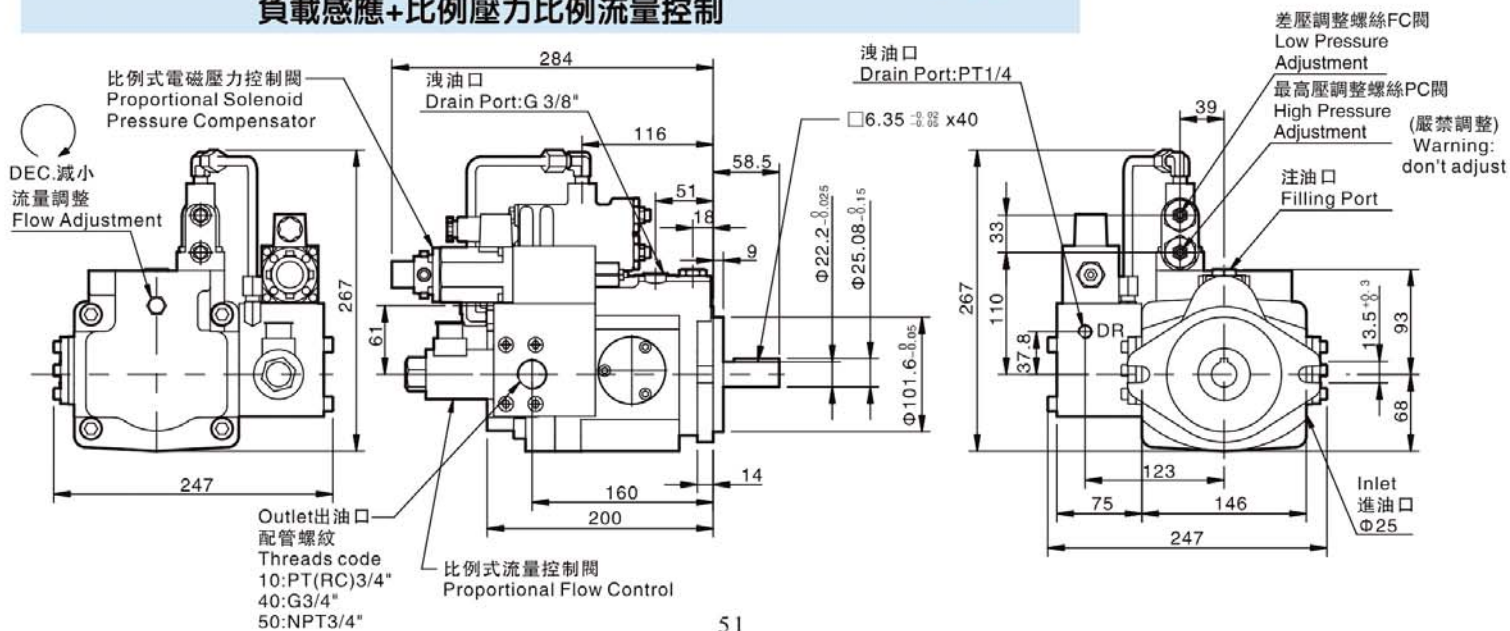


V23HQ,V25HQ Load-sensing Proportional Flow Control 負載感應控制+比例流量控制

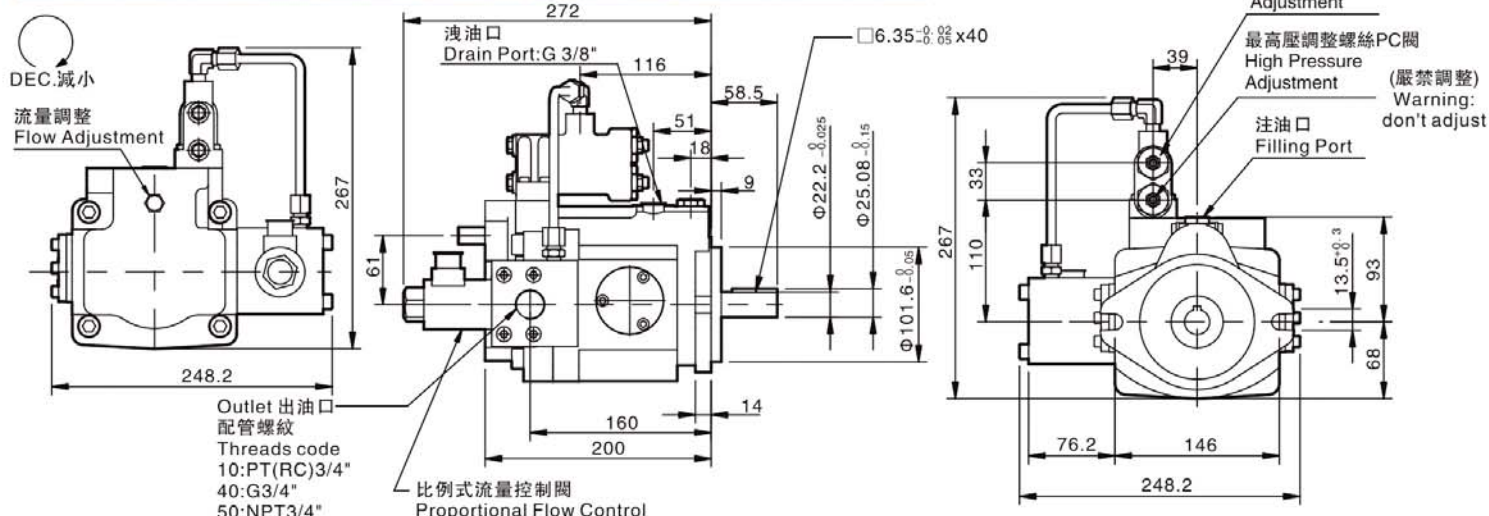


V23,V25 Prepared for thru drive(SAE A Φ82.55) 為通軸準備泵浦(SAE A Φ82.55,需特別註明通軸代碼加 D)

V 23 □ □ □ □ □ — □ □ D □ □

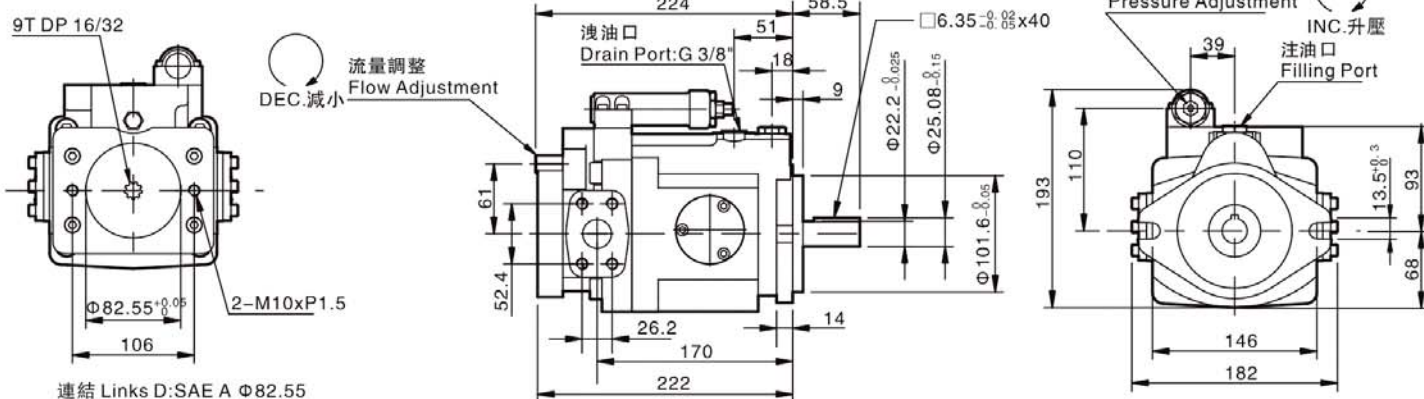

V23,V25 Prepared for thru drive(SAE B Φ101.6) 為通軸準備泵浦(SAE B Φ101.6,需特別註明通軸代碼加 E)

V 23 □ □ □ □ □ — □ □ E □ □

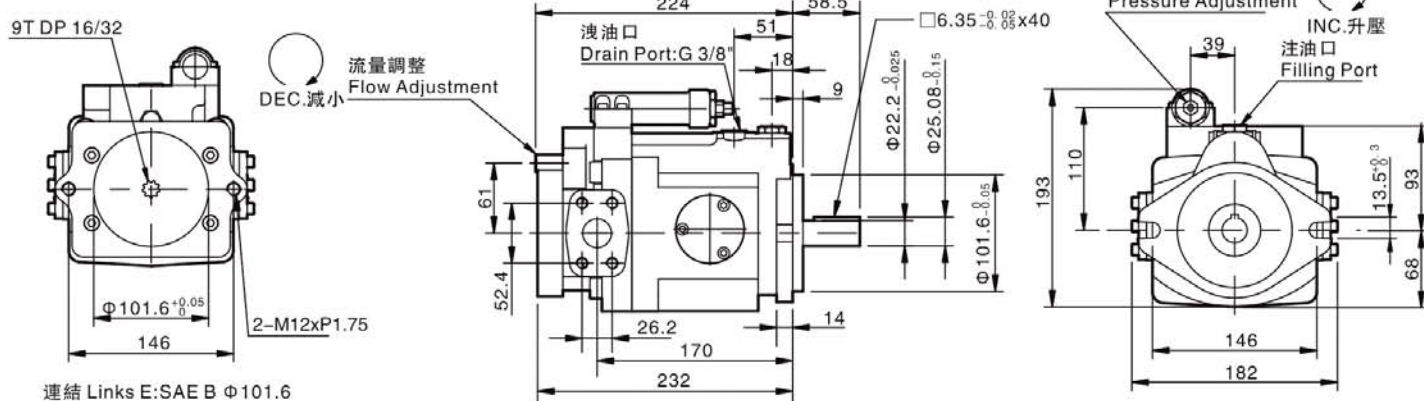


型式Type	A	B	C	CG	D	DG	E	EG	F	FG	G	GJ	GM	HL	HK	HQ
	○				○	○	○	○			○	○	○	○	○	○

為通軸準備可選用的控制型式 Thru Drive Option

V23,V25 Axial Port

後方出油(需特別註明配管方向代碼加 B)


V 23 B

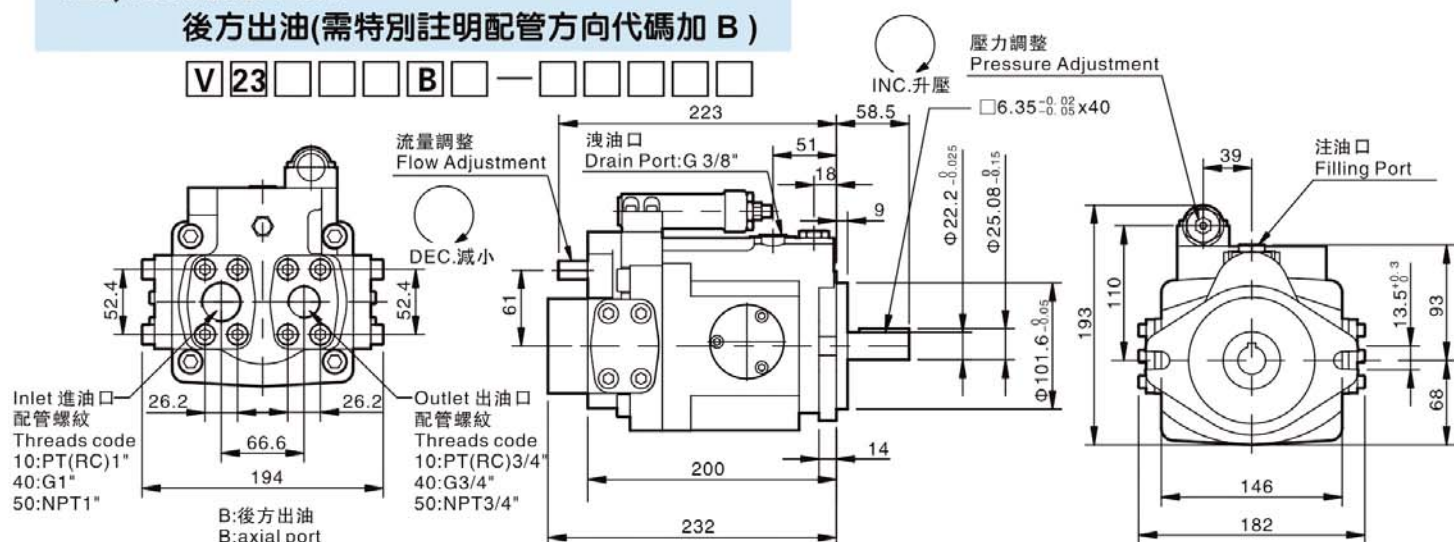

V23,V25 4 connections for axial port

兩側出油加後方出油(需特別註明配管方向代碼加 B2)

V 23 B2

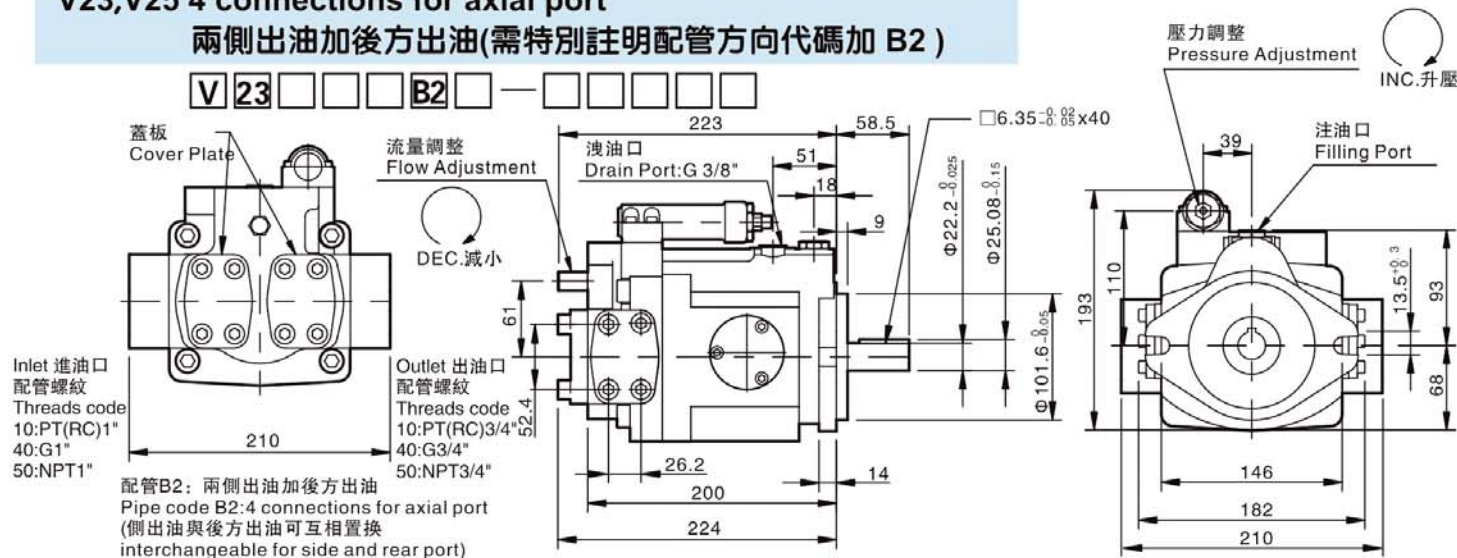


型式Type	A	B	C	CG	D	DG	E	EG	F	FG	G	GJ	GM	HL	HK	HQ
	○	○									○	○	○	○		

後方出油可選用的控制型式 Axial Port Option


V23,V25 Splined Shaft Type

梅花軸心型式

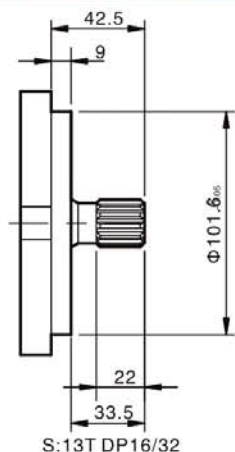

V23,V25 Hydraulic Flange

進出油法蘭

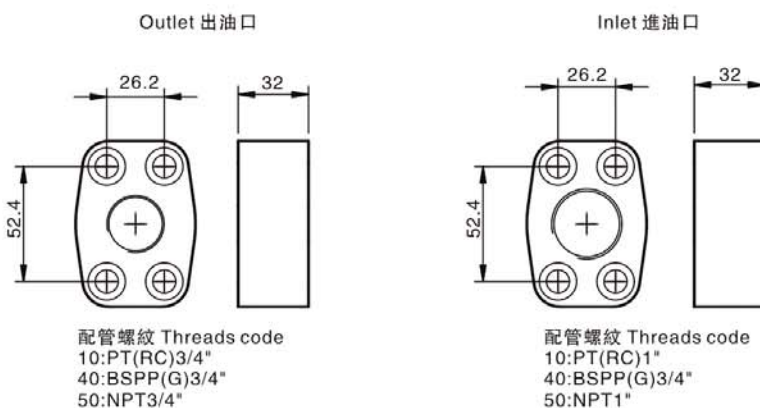

柱塞雙聯泵浦(可與其他型式泵浦連接成雙聯泵浦)Tandem Pump(Multi-option for tandem pump)

Pump 1	V15(V18)	V23(V25)	V23(V25)	V38(V42)	V38(V42)	V38(V42)	V50(V70)	V50(V70)	V50(V70)
Pump 2	V15(V18)	V15(V18)	V23(V25)	V15(V18)	V23(V25)	V38(V42)	V15(V18)	V23(V25)	V38(V42)
A	G 3/8"	G 3/8"	G 3/8"	G 3/8"	G 3/8"	G 1/2"	G 3/8"	G 3/8"	G 1/2"
B	G 3/8"	G 3/8"	G 3/8"	G 1/2"	G 1/2"	G 1/2"	G 3/4"	G 3/4"	G 3/4"
C	57.45	57.45	61	57.45	61	73	57.45	61	73
D	35.1	35.1	52.4	35.1	52.4	58.7	35.1	52.4	58.7
E	35.1	35.1	26.2	35.1	26.2	30.2	35.1	26.2	30.2
F	35.1	52.4	52.4	58.7	58.7	58.7	69.9	69.9	69.9
G	35.1	26.2	26.2	30.2	30.2	30.2	35.7	35.7	35.7
H	M8x20	M8x20	M10x16	M8x20	M10x16	M10x16	M8x20	M10x16	M10x16
I	M8x20	M10x16	M10x16	M10x16	M10x16	M10x16	M12x25	M12x25	M12x25
J	147	147	170	147	170	179	147	170	179
K	147	170	170	179	179	179	256.5	256.5	256.5
L	332	369	402	378	401	410	464	493	502
M	382	419	455	428	454	465	515	546	555
N	48	48	51	48	51	51	48	51	51
O	48	51	51	51	51	51	73	73	73
P	6	9	9	9	9	9	10	10	10
Q	4.76x32	6.35x40	6.35x40	6.35x40	6.35x40	6.35x40	7.94x45	7.94x45	7.94x45
R	13	14	14	14.5	14.5	14.5	24	24	24
S	Φ19.05	Φ22.22	Φ22.22	Φ22.22	Φ22.22	Φ22.22	Φ31.75	Φ31.75	Φ31.75
T	21.15	25.08	25.08	25.08	25.08	25.08	35.35	35.35	35.35
U	Φ82.55	Φ101.6	Φ101.6	Φ101.6	Φ101.6	Φ101.6	Φ127	Φ127	Φ127
V	Φ25	Φ25	Φ25	Φ31	Φ31	Φ31	Φ38	Φ38	Φ38
W	Φ25	Φ25	Φ25	Φ31	Φ31	Φ31	Φ38	Φ38	Φ38
X	106	146	146	146	146	146	181	181	181
Y	131	146	146	160	160	160	208	208	208
Z	165	182	182	198.6	198.6	198.6	261.5	261.5	261.5
A1	44	39	39	39	39	39	74	74	74
A2	31.2	31.2	31.2	31.2	31.2	31.2	40	40	40
A3	5	5	5	5	5	5	8	8	8
A4	84	110	110	121	121	121	119	119	119
A5	11	13.5	13.5	13.5	13.5	13.5	18	18	18
A6	44.5	58.5	58.5	58.5	58.5	58.5	57	57	57
A7	160	193	193	210	210	210	233.5	233.5	233.5
A8	91.5	93	93	113.5	113.5	113.5	133.5	133.5	133.5
A9	60	68	68	72	72	72	100	100	100

